




**Ultra**frame<sup>®</sup>  
Transforming light and space



V6 | February 2018

# **SYSTEM OVERVIEW & DESIGN GUIDE**

## SUPER-INSULATED COLUMNS

# SYSTEM OVERVIEW & DESIGN GUIDE

## SUPER-INSULATED COLUMNS

A build with super-insulated columns is the best of all worlds, combining elements of light and sky with the solidity of internal plastered walls and ceilings. A whole new category of home extension – and as you would expect from Ultraframe it couldn't be easier.

A super-insulated columns consists of exciting and innovative elements - super insulated columns and an internal perimeter ceiling.

For little more than the cost of a standard conservatory and with no Local Authority 'red tape' in the majority of cases\*, you can deliver additional light and space to local homeowners.

With super-insulated columns columns, it's up to you whether you choose full height glazed walls or 'dwarf walls' and their incorporation – at 90 degree corners, against the house wall and even in the middle of the side/front – can add a whole new look to the home extension. The super-insulated columns columns are engineered in factory conditions and are 5 times more thermally efficient than an equivalent sized brick column – their use allows speedy site installation, saving a number of days of the on-site build time when compared to brickwork piers / columns.

**For assistance with Super-insulated columns design / specification please contact the Technical Support Team on 01200 452918 or email techsupport@ultraframe.co.uk**



**Technical Guide to insulated internal pelmet Perimeter Ceiling.**  
Please also read the stand alone guide for the perimeter ceiling.

## CONTENTS

Overview	3	Column plinth positioning / finishing	21
Design principles	4 - 5	Window and door information	22, 24 - 25
Column design options	6 - 9	Insulated internal pelmet perimeter ceiling	23, 26 - 27
90° corner column	6	Cill options	28 - 29
In-line column	7	Cornice detailing options	30 - 31
Abutment column	8	Wiring / cabling and Super-insulated columns electric radiant panel heater	32 - 33
Column finishing details	9	Plasterboarding / internal finishing	34 - 35
Eaves interface	10 - 11	Goal post design - General arrangements	36
Standard eaves beam	10	Paint finish and colour options	37
Super duty eaves beam	11	Ordering procedure and order form	38 - 39
Rainwater disposal options	12 - 13		
Posts and support brackets/structural products	14 - 20		
Posts/Brackets	14 - 15		
Structural columns - full height on masonry	16		
Structural columns - full height on cill	17		
Straps and brick ties	18 - 20		

Super-insulated columns, insulated internal pelmet and Cornice are all charged separately. Many of the super-insulated columns options displayed in this brochure attract additional charges. Please ensure that any options chosen are made clear to the consumer by the trade partner at point of sale.  
\* Retailers/Dealers need to discuss Building Regulations and Planning permission with potential customers.

## OVERVIEW

This technical guide illustrates the super-insulated columns product with 70mm window frames and 300mm wide brickwork walls. **If you are specifying any other sizes please refer to pages 19, 26-27 and 34.**

### Product definition

- There are a number of elements to a super-insulated columns;
1. Super insulated columns clad with powder coated coloured aluminium cladding panels to externally create a radical new look whilst internally improving usability and comfort levels.
  2. An internal perimeter ceiling which consists of an engineered ladderwork system to which plasterboard is fixed. It is feasible to use columns only with no perimeter ceiling - a special 'cap' is fitted to the top of the column, this is not supplied, see page 35.
  3. Cornice decorative fascia, that hides the end of the glazing bars and gutter, creating a totally different look externally and which themes perfectly with the aluminium column claddings.



### U-Design

U-Design is a piece of design and configuration software exclusive to Ultraframe. As well as visualising and pricing the Super-insulated columns, upon entry of the customers postcode it checks the wind and snow loads at the exact location and immediately upgrades the roof and column specification should it be needed. This guide is an overview of the design parameters of super-insulated columns - U-Design interactively looks at loadings to correctly calculate structural specifications.

### Super-insulated columns and perimeter ceiling with Cornice



### Key performance criteria

- Choose from columns for full height situations or dwarf wall
- At the top of the columns, use either Cornice or a cill detail
- Choose from two suites of columns in large or small formats
- Suite comprises of 90 degree, in-line connectors & abutments
- U value for the post of 0.15, which is five times more thermally efficient than an equivalent sized brick column.
- Optimised to work with Building Regulation compliant 300mm cavity dwarf wall construction. For cavity walls less than 300mm, studding out is required - see page 34.

### Super-insulated columns





# DESIGN PRINCIPLES

Super-insulated columns is a new type of home extension and guidance is needed to ensure aesthetically pleasing buildings are designed. A guiding principle is the 'golden ratio' which has underpinned effective design for centuries.



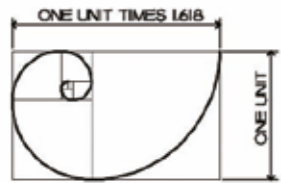




DIAGRAM OF THE PROPORTIONS OF THE GOLDEN MEAN

GEORGIAN STYLE HOUSE WITH FRONT ELEVATION BASED ON PROPORTIONS OF THE GOLDEN MEAN

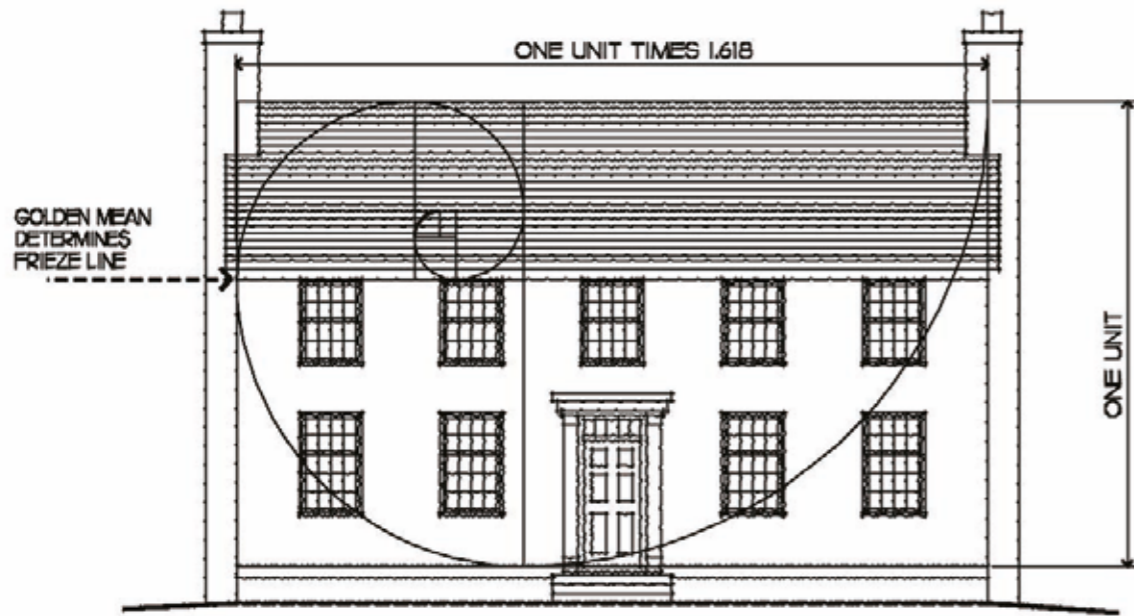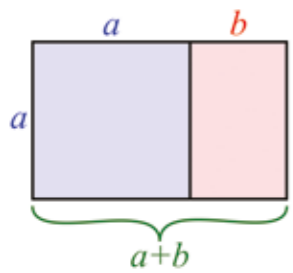

Since at least the 20th century, many artists and architects have proportioned their works approximately to the golden ratio, especially in the form of the golden rectangle is where the ratio of the longer side to the shorter is the golden ratio (1:1.618). This proportion is believed to be aesthetically pleasing.


Golden ratio = (1:1.618)

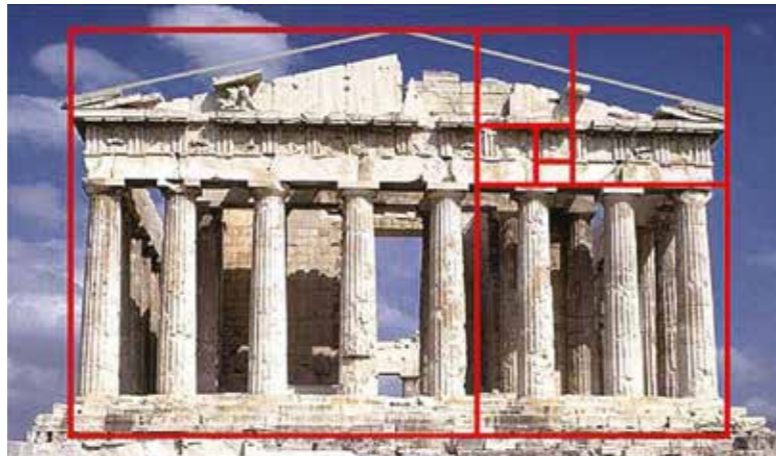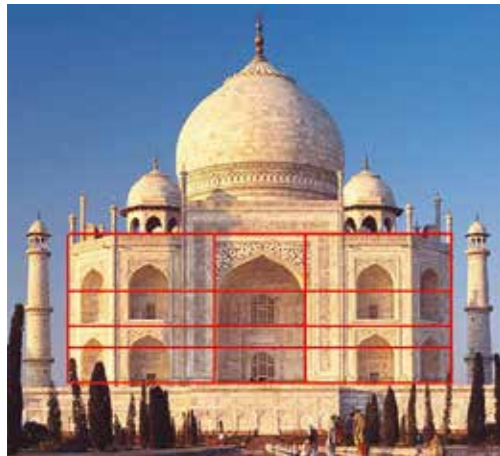




## DESIGN OPTIONS


### 90° Corner Column Configuration

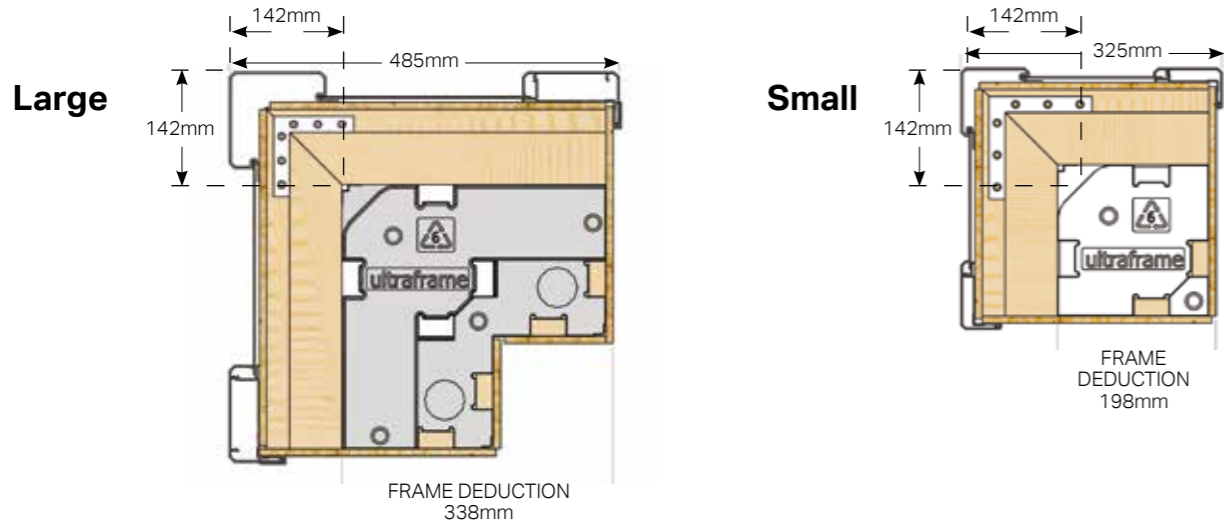

### Full height frames large and small

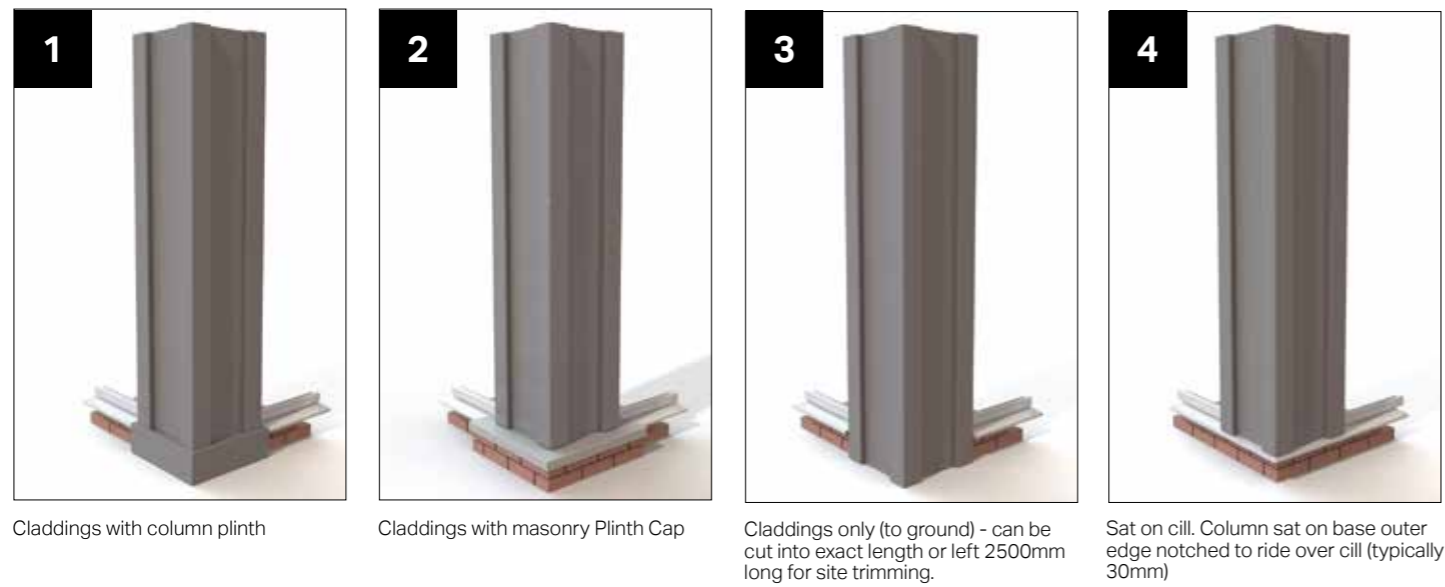


### Dwarf Wall large and small

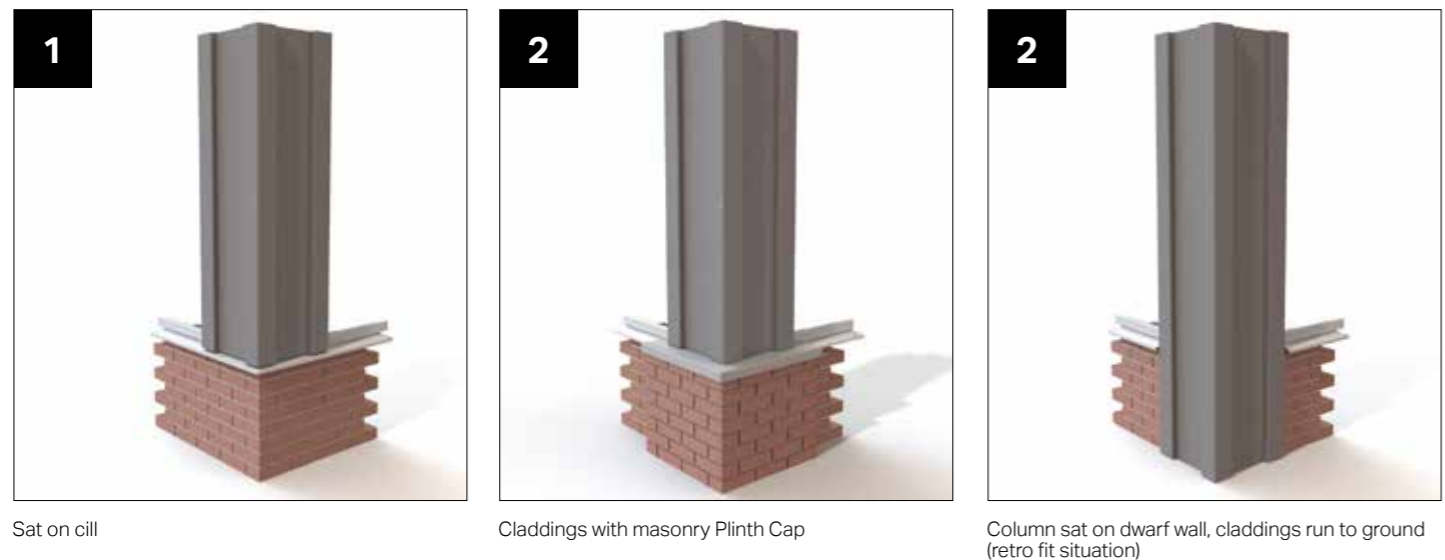


## DESIGN OPTIONS

### In - Line Column Configuration


IMPORTANT NOTE: WHEN DOORS ARE ADJACENT TO AN IN-LINE COLUMN, FRAME ADD ON MAY BE NECESSARY TO ENSURE THE DOORS ARE NOT RESTRICTED FROM OPENING

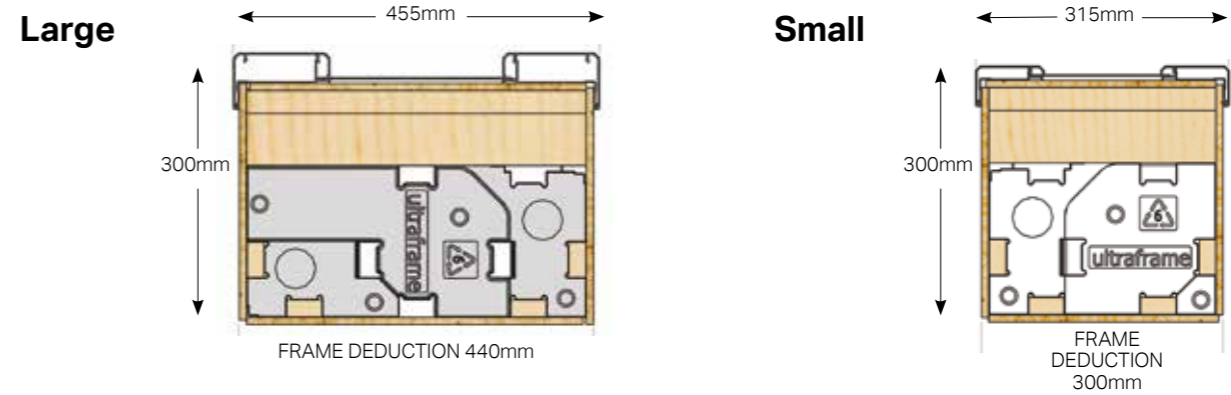

### Full height large columns

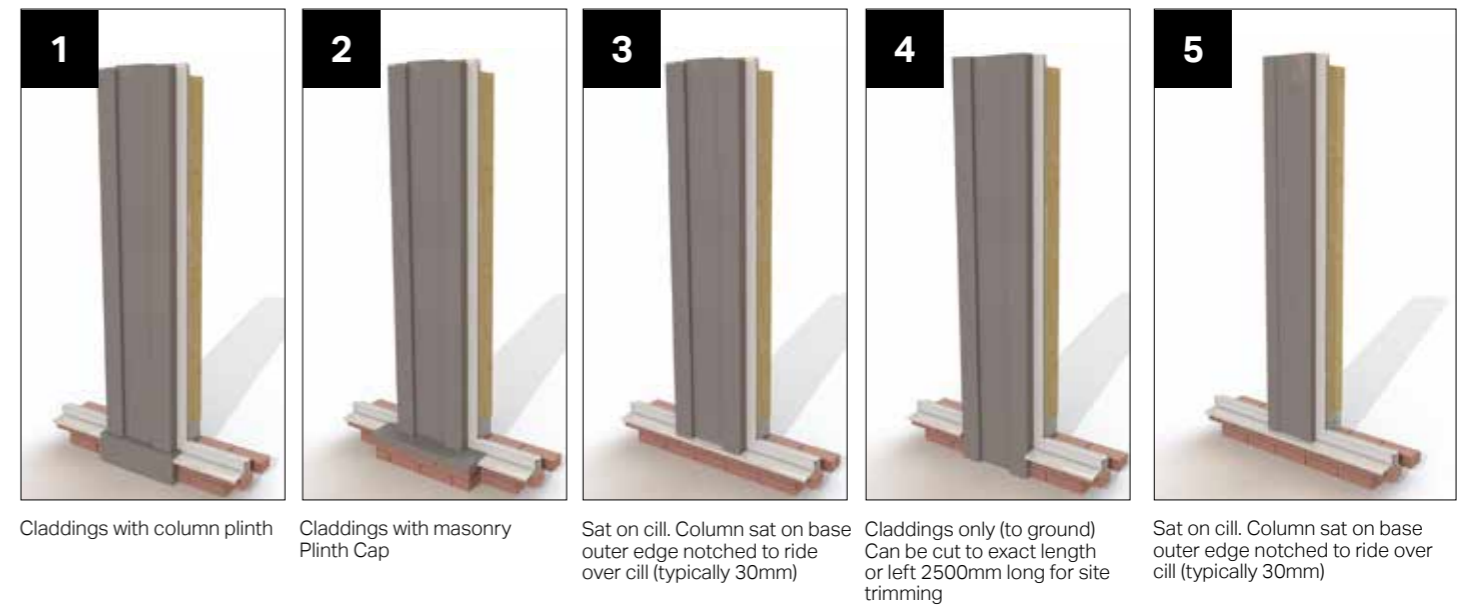



### Dwarf wall large columns

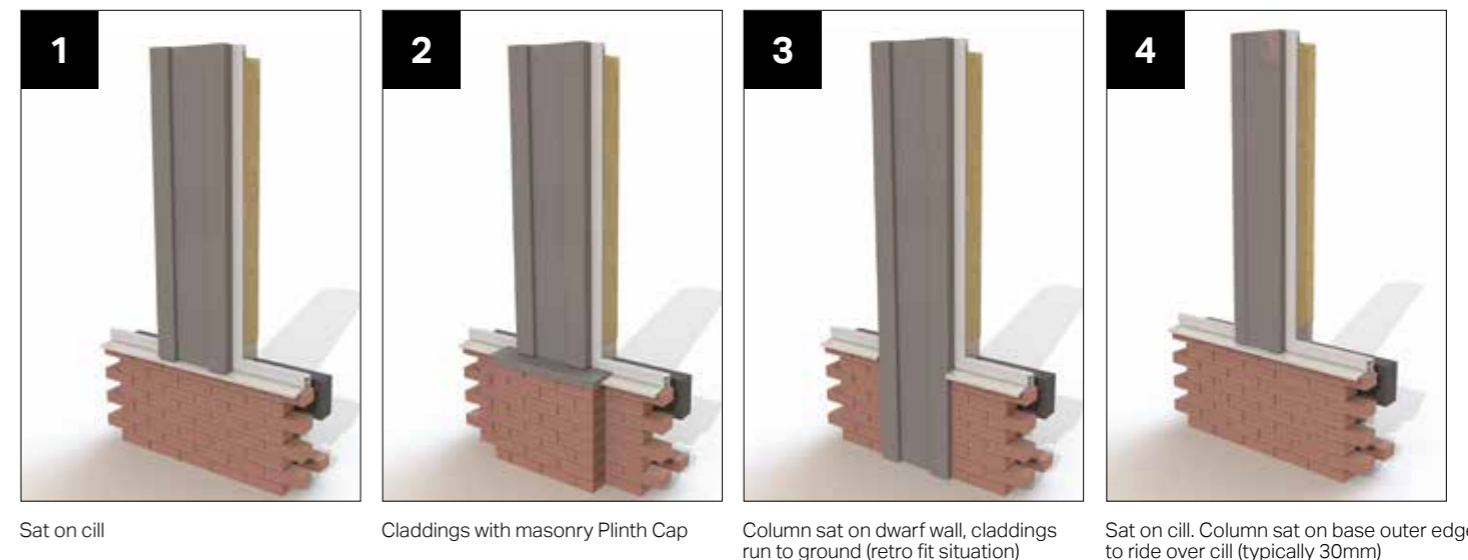


### Dwarf wall small columns

# DESIGN OPTIONS

## Abutment Column Configuration - left hand illustrated

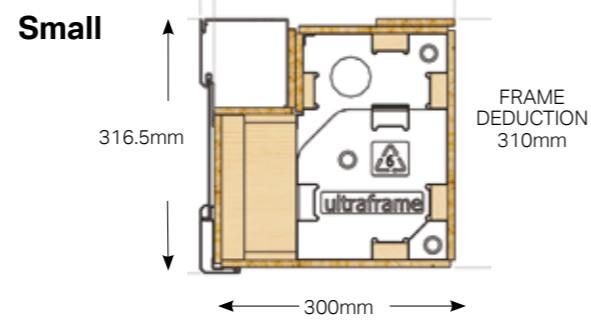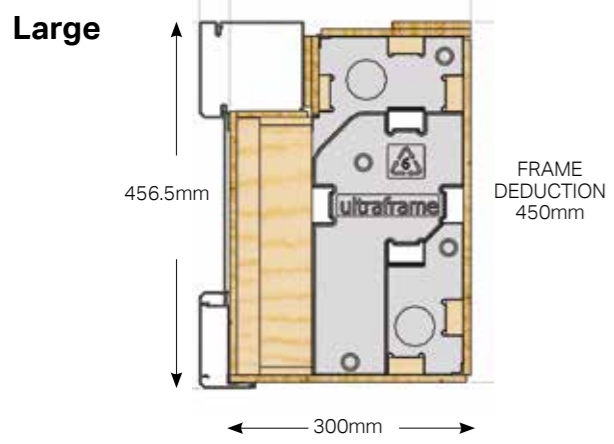

## Full height large columns

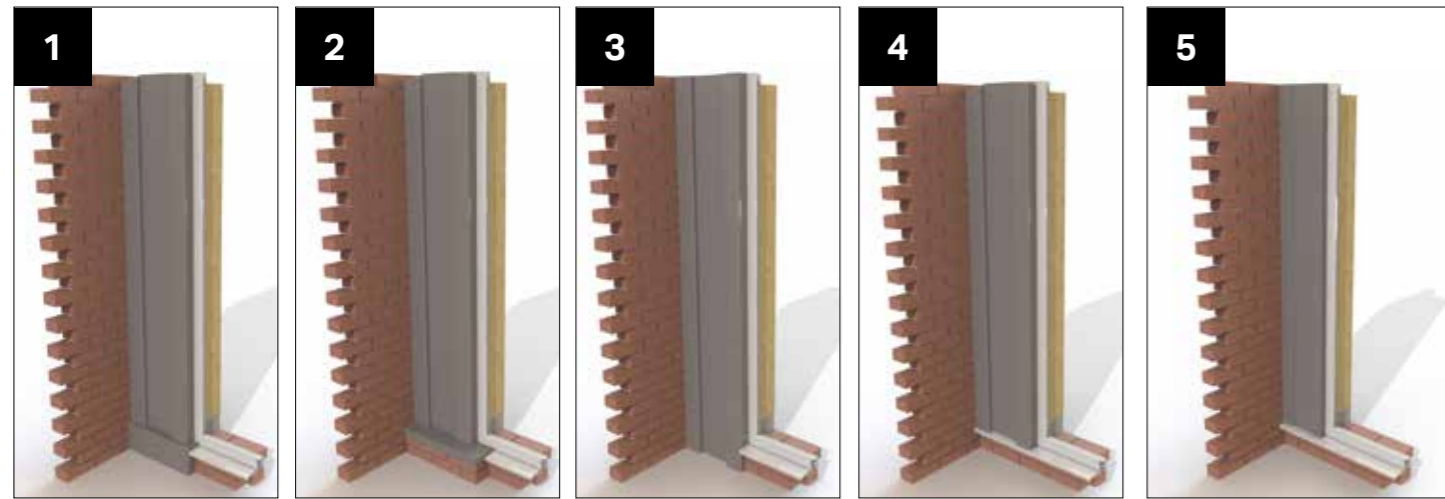

1 Claddings with column plinth

2 Claddings with masonry Plinth Cap


3 Claddings only (to ground) Can be cut to exact length or left 250mm long for site trimming

4 Sat on cill. Large column sat on base outer edge notched to ride over cill (typically 30mm)

5 Sat on cill - small

## Full height small columns

## Dwarf Wall large columns

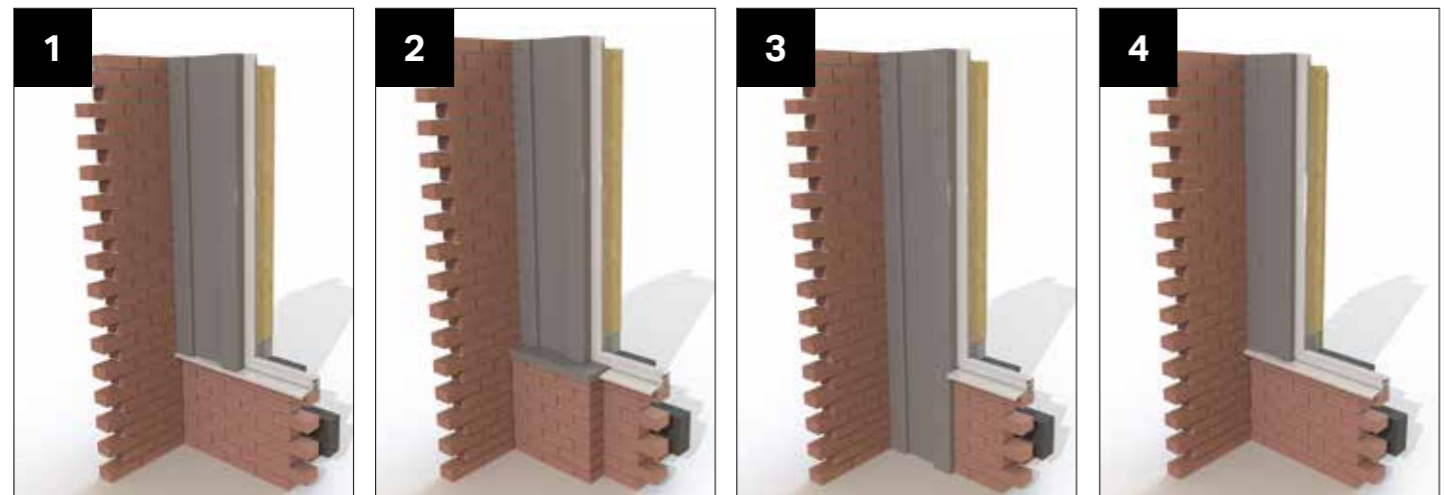

1 Sat on cill

2 Claddings with masonry Plinth Cap

3 Column sat on dwarf wall, claddings run to ground (retro fit situation)

4 Sat on cill - small

## Dwarf Wall small columns

# DESIGN OPTIONS

## Top of column detailing

Choose from using Cornice (Ultraframe's preferred option) or with a cill detail (minimum 150mm cill required, supplied by others)




1 Super-insulated columns with Cornice




2 Super-insulated columns with Cill


## Bottom of column detailing

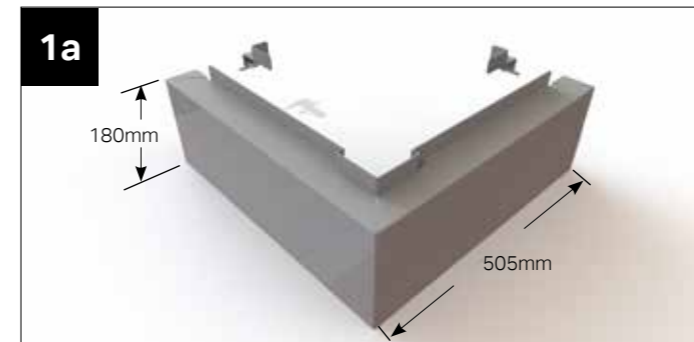


1a Large Column Corner Plinth - Left and right endcaps illustrated.

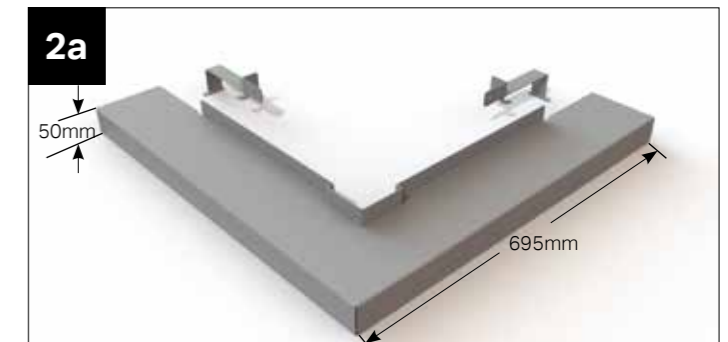


2a Large Column Corner Masonry Plinth Cap - Left and right endcaps illustrated.

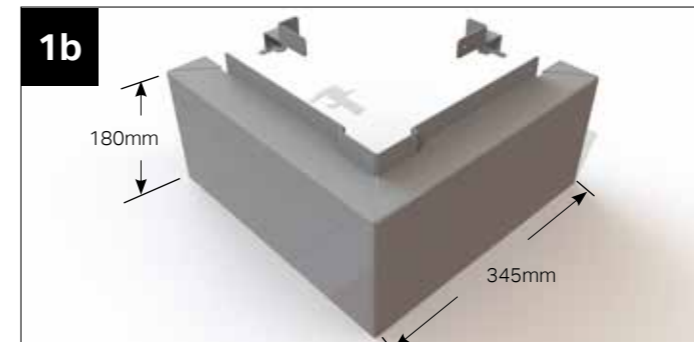


1b Small Column Corner Plinth - Left and right endcaps illustrated.

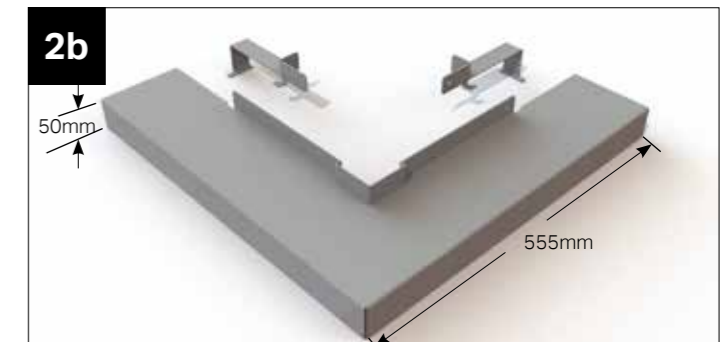

2b Small Column Corner Masonry Plinth Cap - Left and right endcaps illustrated.

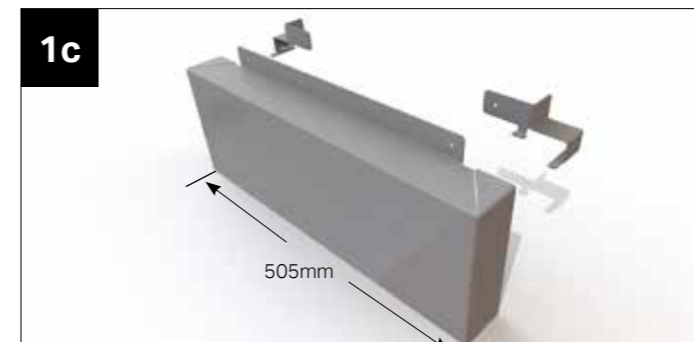


1c Large In-line Column Plinth (Cut down for small in-line)- Left and right endcaps illustrated. Also used in abutment situations and is cut down on site for LH & RH situations. Large only (cut down for small inline).

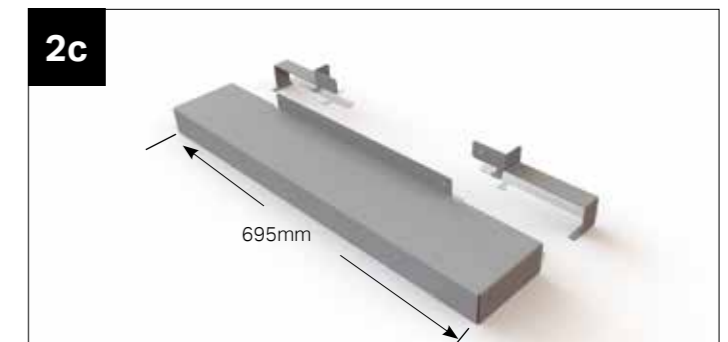



2c Large In-line Column Masonry Plinth Cap (Cut down for small in-line)- Left and right endcaps illustrated. Also used in abutment situations and is cut down on site for LH & RH situations. Large only (cut down for small inline).



STANDARD EAVES CROSS SECTION DETAILS


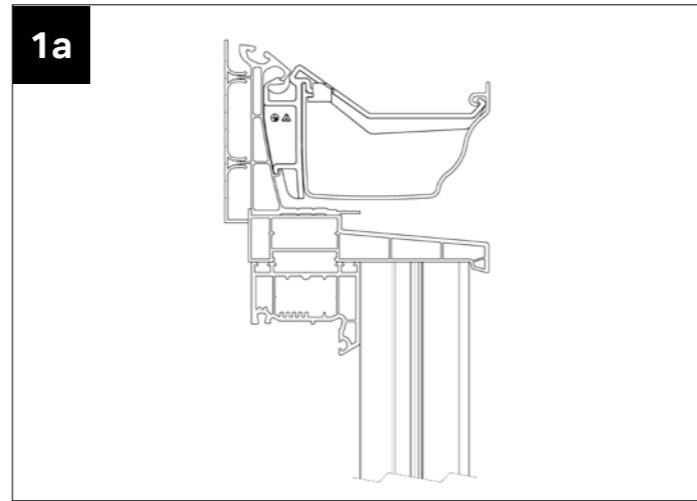


Standard eaves with cill

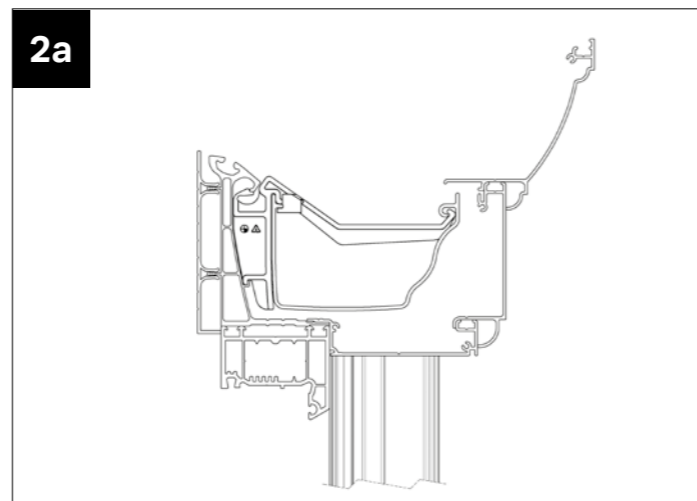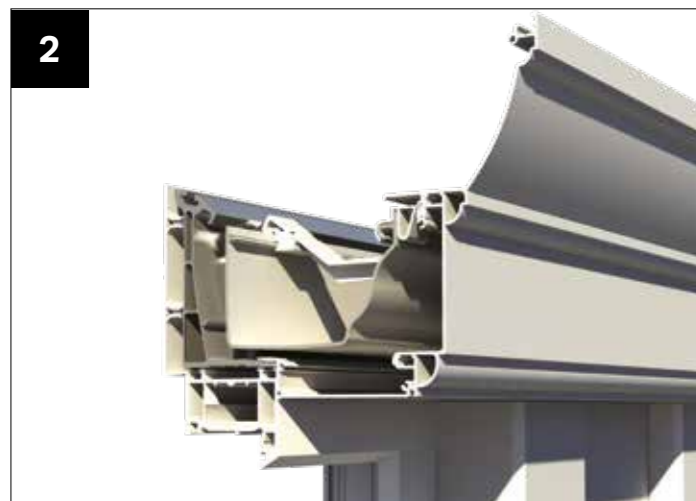



Standard eaves with cornice

Note: lower section of Cornice sits 18mm from frame head. This will not interfere with outward opening, top hung casement openers.

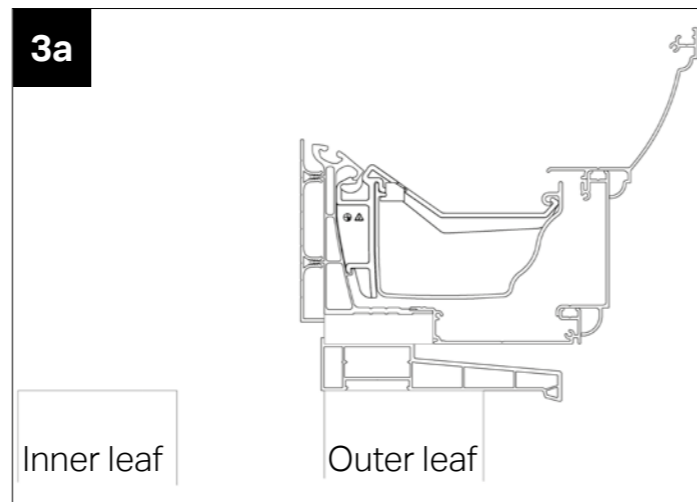
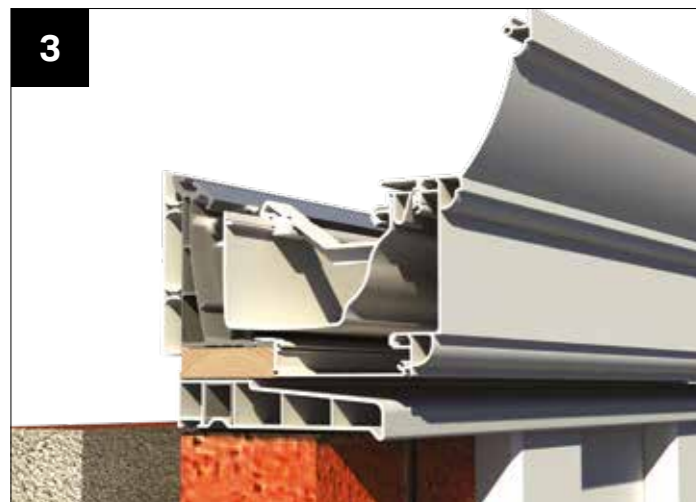


Standard eaves with Cornice and cill for full height brickwork (timber packer not supplied)


SUPER DUTY EAVES CROSS SECTION DETAILS

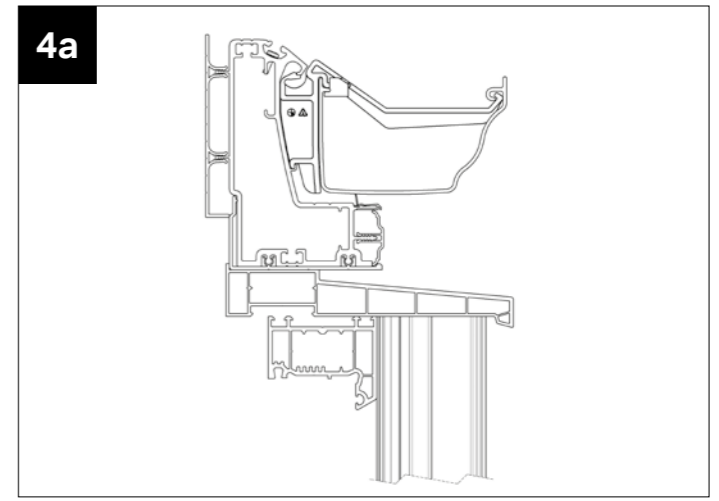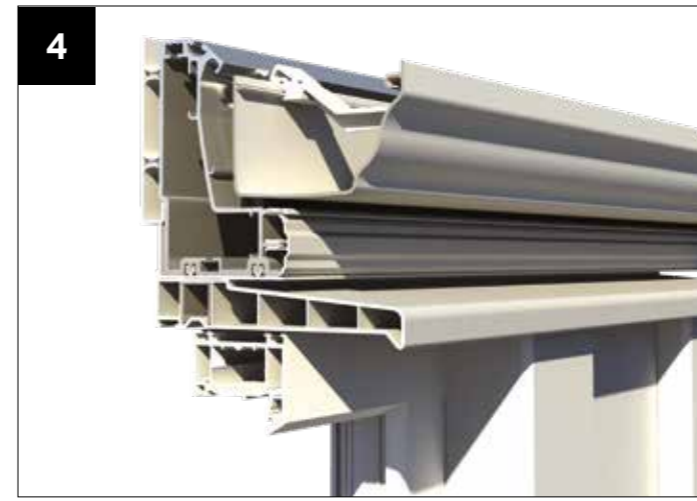

Super Duty eaves with cill

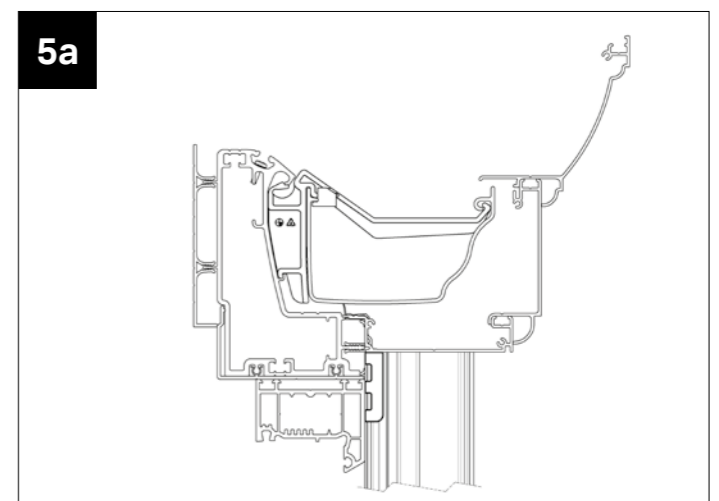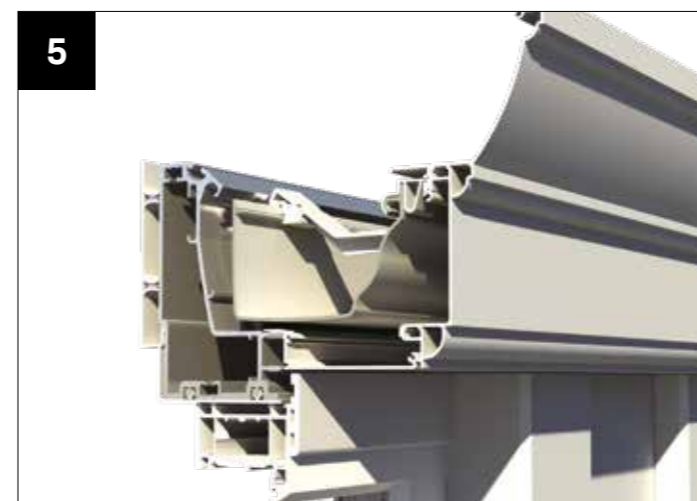

Super Duty eaves with cornice (trims not supplied)

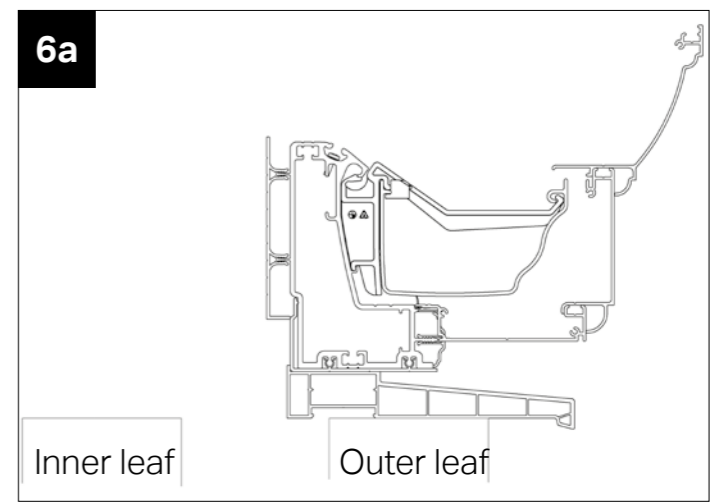

Super Duty eaves with Cornice and cill for full height brickwork


# RAINWATER DISPOSAL OPTIONS

## Rainwater pipe in abutment post


In the abutment post we can hide a rainwater pipe. This saves time fitting an outlet into Cornice, see page 13 for full design and construction details. This option works on full height frames/columns only




## RAINWATER PIPE IN ABUTMENT POST

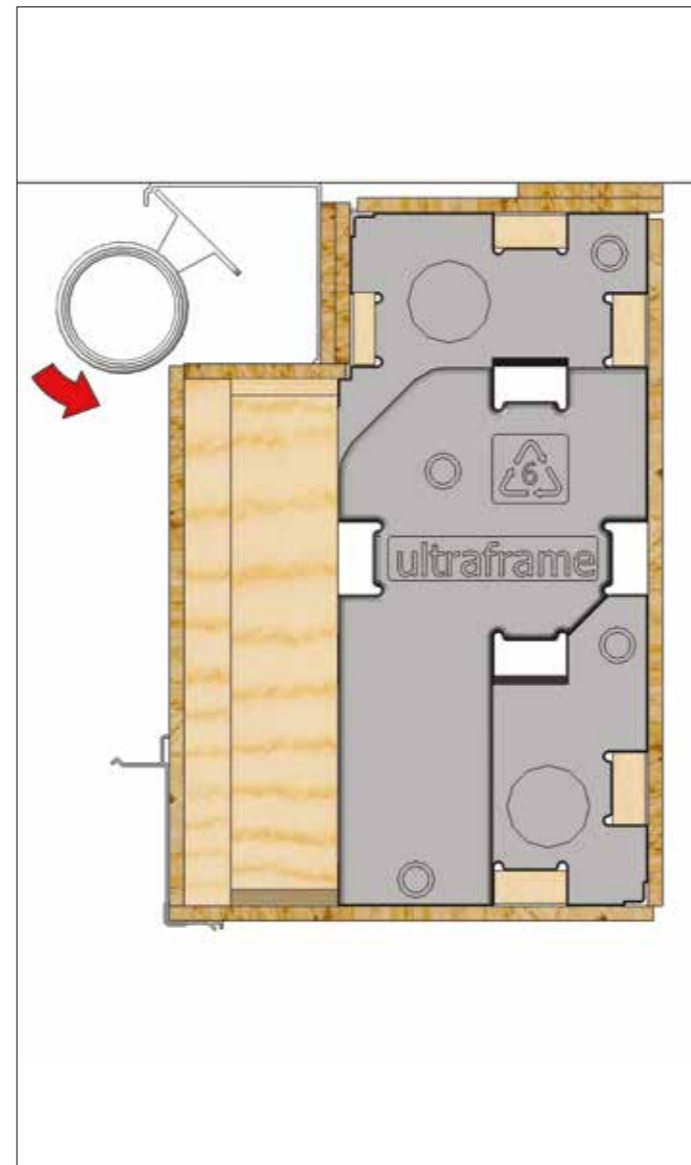

Rainwater downpipe fits into the recessed channel on the abutment column.

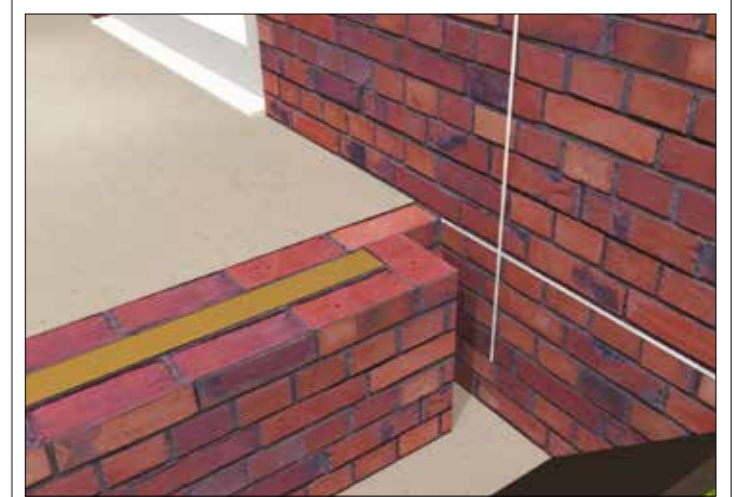

If a concealed rainwater downpipe has been specified on the Abutment column, then the base work is required to step in to allow for the downpipe to exit below the column.

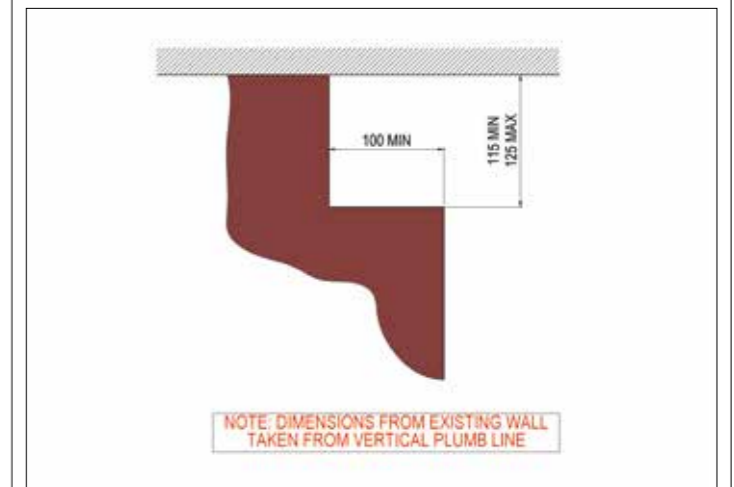

Base work detail shown for the concealed rainwater downpipe in the Abutment column.

## Other rainwater downpipe options




1 Return Cornice and guttering along house wall.



2 Elephants trunk outlet. (CRN014. If it is not possible to have full height columns. i.e on dwarf wall. NOTE: the above CRN014 cover outlet can be positioned to suit.



When using abutment columns, a vertical DPC is required between the column and host wall.

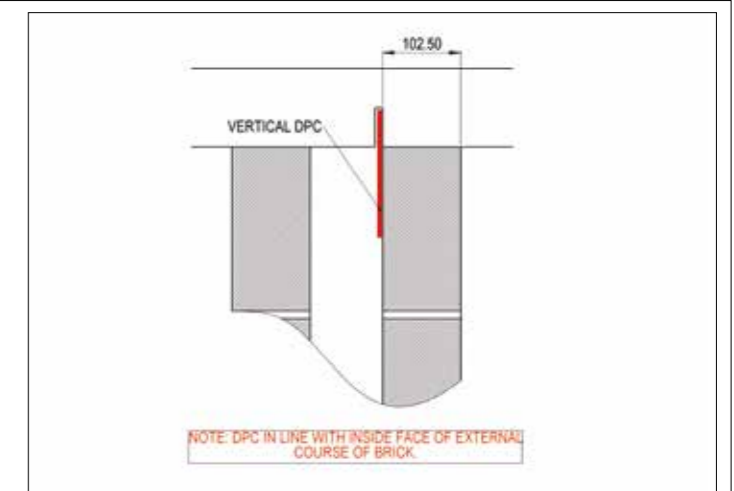

Position of slot for vertical DPC shown.



# SET OUT POSTS

## Introduction

When designing the new building for your consumer, there are always compromises to be made during the design process. If you use the U-design software yourself, then the effect of these design decisions can be viewed instantaneously and any compromises quickly implemented. These changes could be influenced by;

- the door and window positions,
- whether the columns are full height or sat on dwarf walls,
- if the column is sat on cill/off cill can be important
- the size of the proposed building
- and – of course – perhaps the most critical element is the resultant effect of the wind and snow loadings at the postcode of the proposed building.

**If you are not a direct user of U-Design, then this process of amending the design may happen as a result of negotiations with Ultraframe (if you are a direct buyer) or with one of Ultraframe's fabricator/trade intermediary suppliers.**

### Lets look at an example.

Take a location with a wind load of 1.0kN/m<sup>2</sup> and full height frames with large corner columns NOT on cill.

Maximum projection of the building is as follows;

- 2.89m with standard set out posts and two straps
- 4.62m with structural post and internal support bracket
- 6.93m with structural post, internal support bracket and at least two 'fixed frames' in front elevation.

Pages 14-20 discuss all the structural design elements. Please call 01200 452918 or email [techsupport@ultraframe.co.uk](mailto:techsupport@ultraframe.co.uk) if you need help with these structural design rules.



Illustration shows standard post which also aids foundation/brickwork set out.



This is how setout post is wrapped/packed.




Standard post comes with its own fixing kit (LRP020)



Structural post (right) and structural internal anchor bracket (options for large and small corner columns).


# FOUNDATIONS SET OUT

## Large Corner Brick Plinth sizes

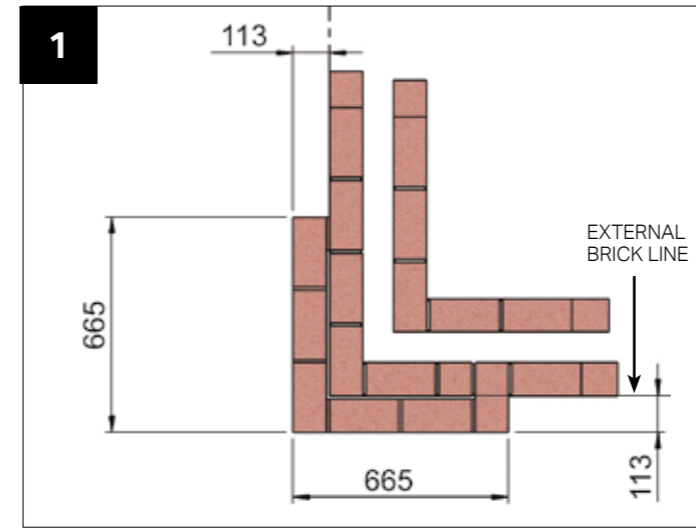


NOTE: THE SMALL INLINE AND ABUTMENT COLUMNS ARE ONLY AVAILABLE ON CILL



## Small Corner Brick Plinth sizes

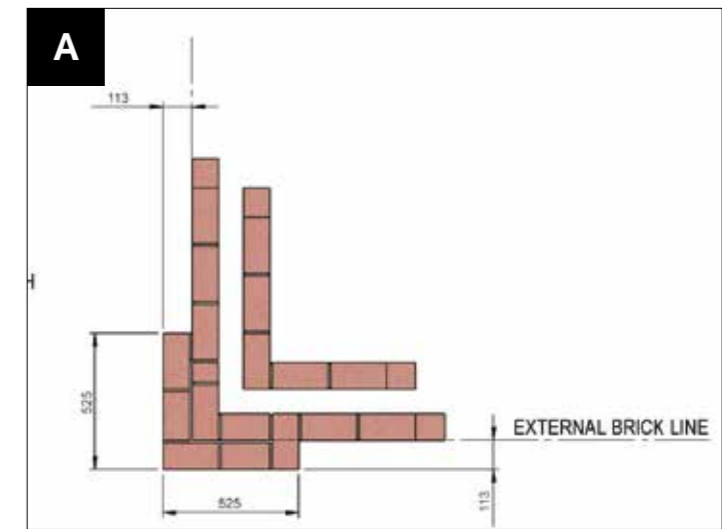

## Large Abutment Brick Plinth sizes

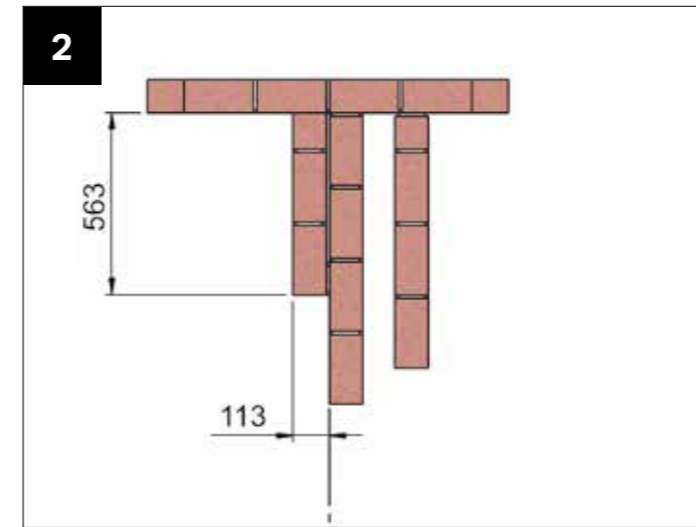

## Large Inline Brick Plinth sizes

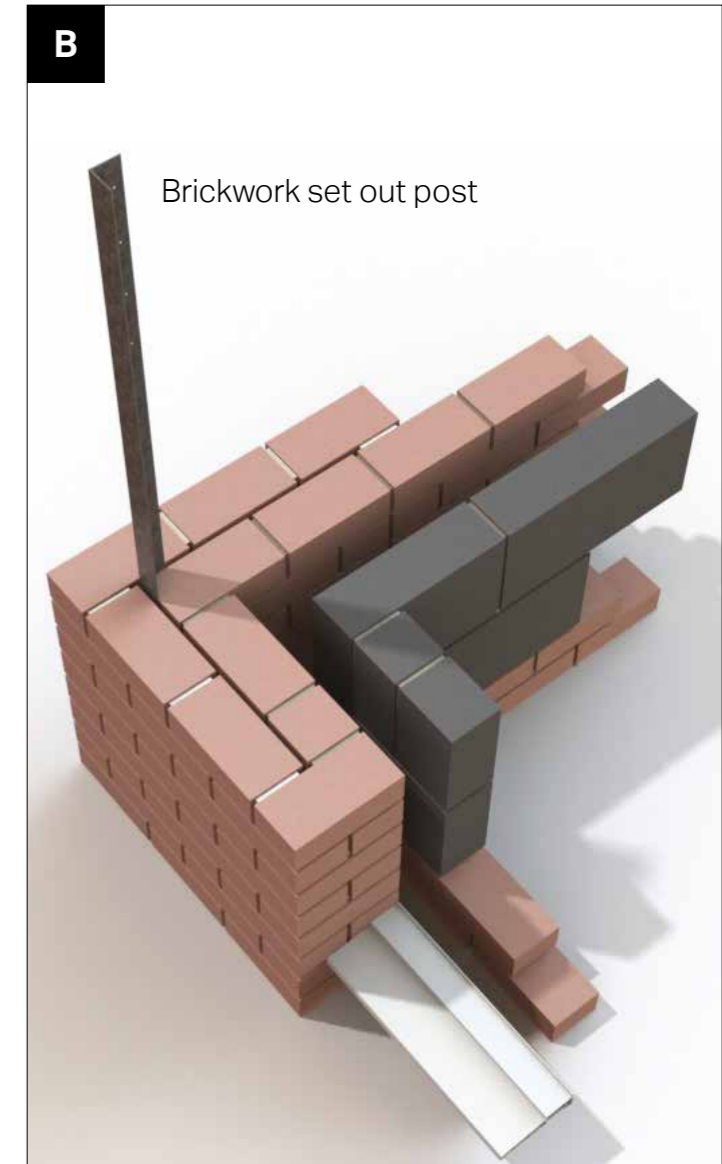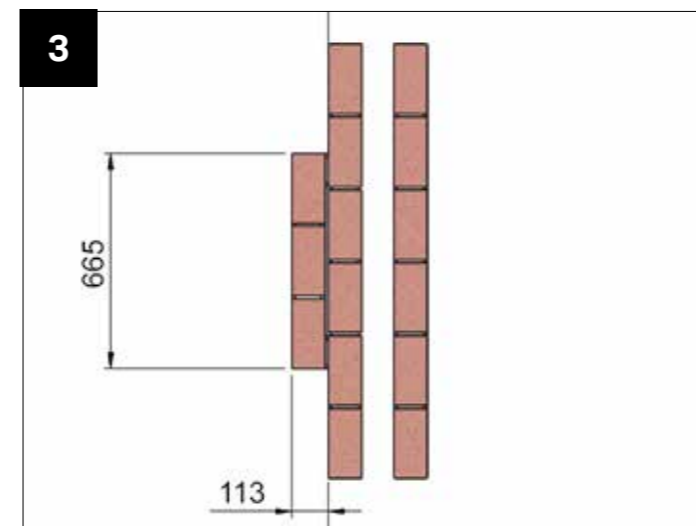




## STRUCTURAL COLUMNS

Structural column rules:

- Full height only.
- Large corner column only.
- Not available as 'on cill' option.

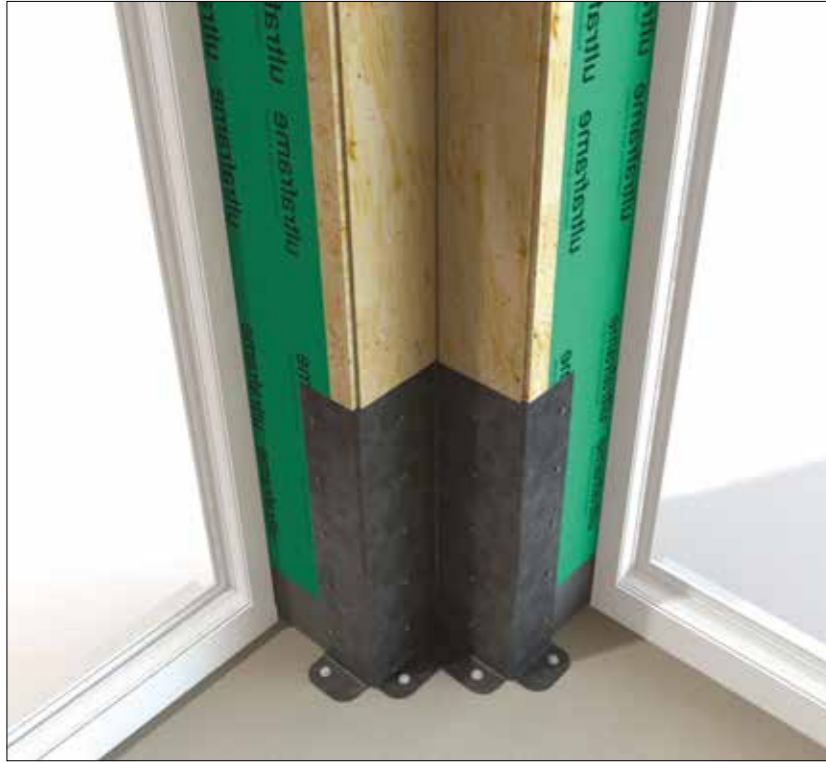


Internal structural steel plate is anchored to slab. Plate may require recessing dependant on finished floor.




Structural setout post and internal fixing plate


## FULL HEIGHT COLUMN ON CILL

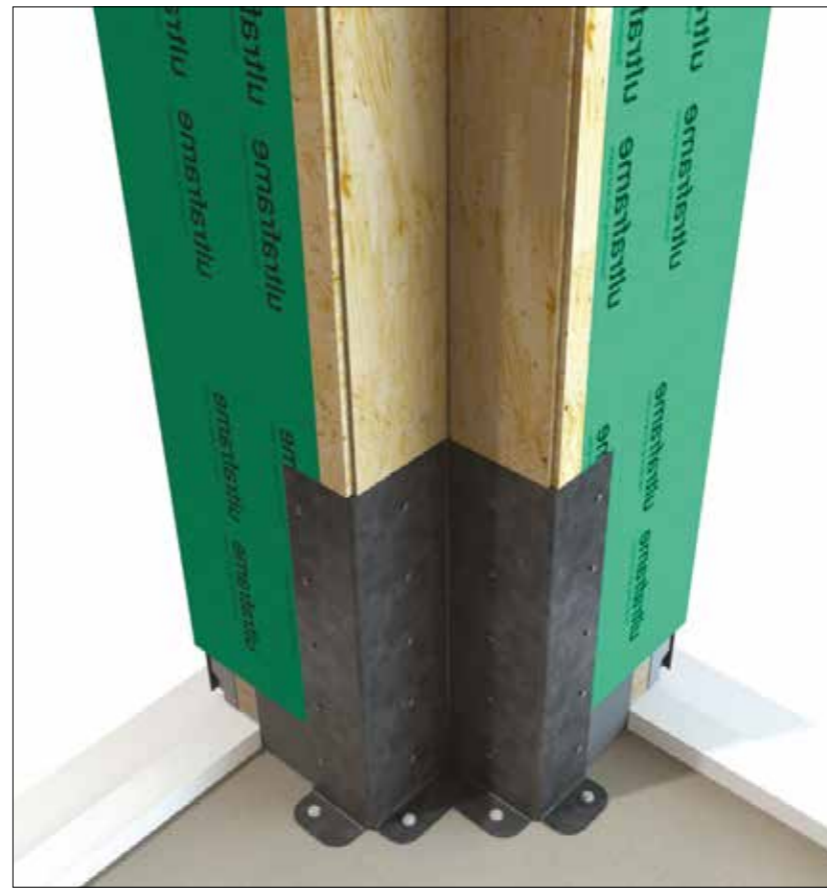


Internal structural steel plate is anchored to slab. Plate may require recessing dependant on finished floor.

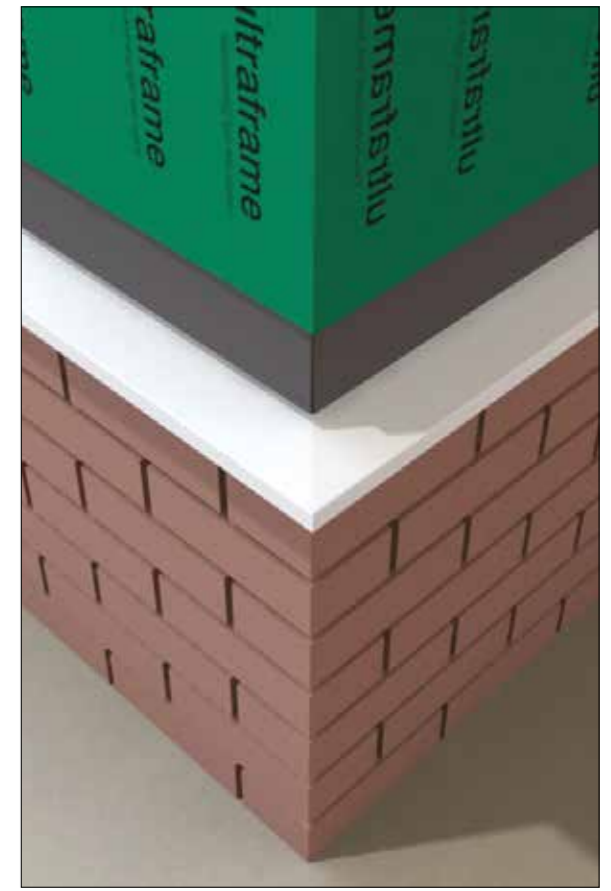


Note: removal of setout post is required to accommodate cill.

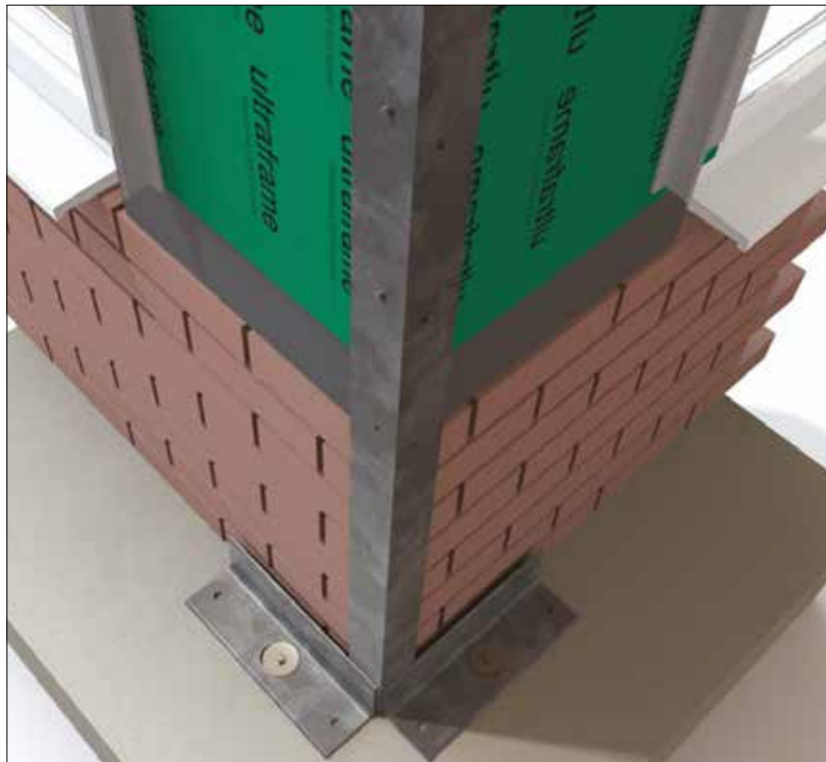

External structural steel post is anchored to footings

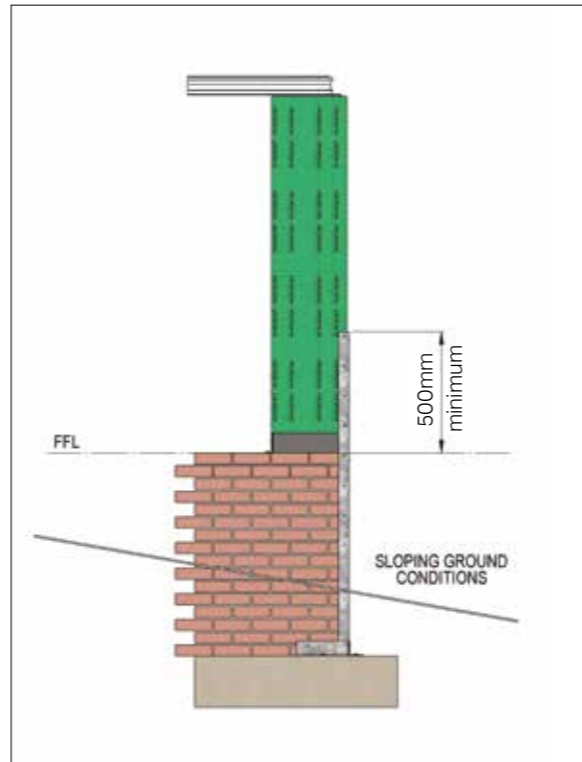


In situations where ground conditions slope away, ensure that structural post projects above finished floor by 500mm minimum. If this is not possible contact Ultraframe technical support for advice.

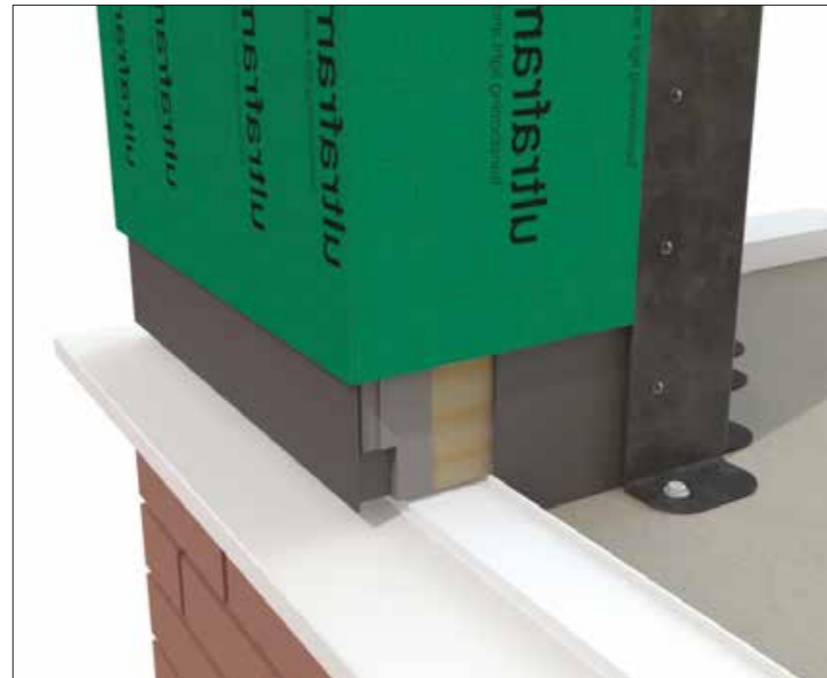


### Large Corner

If using full height columns on cill, removal of brickwork setout post is required and internal fixing plate is used to fix and stabilize column. There is no requirement for additional internal straps.

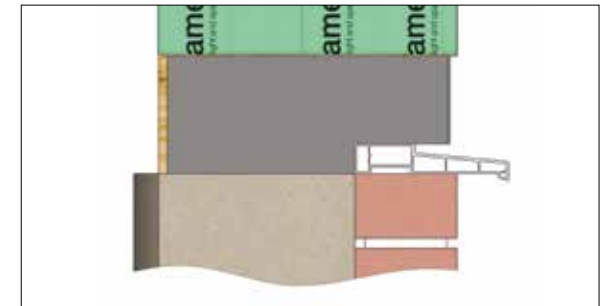


Cill clearance cutout is prepared in the factory (state cill height).

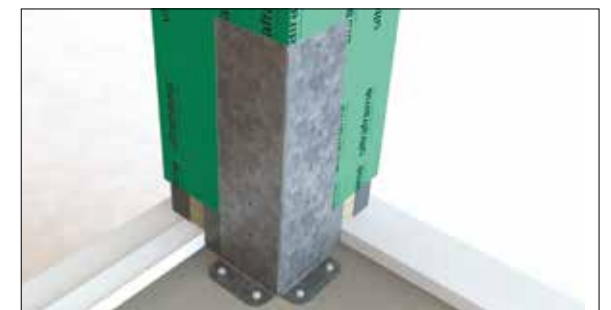


### Small Corner



## COLUMN STRAPS (FULL HEIGHT)

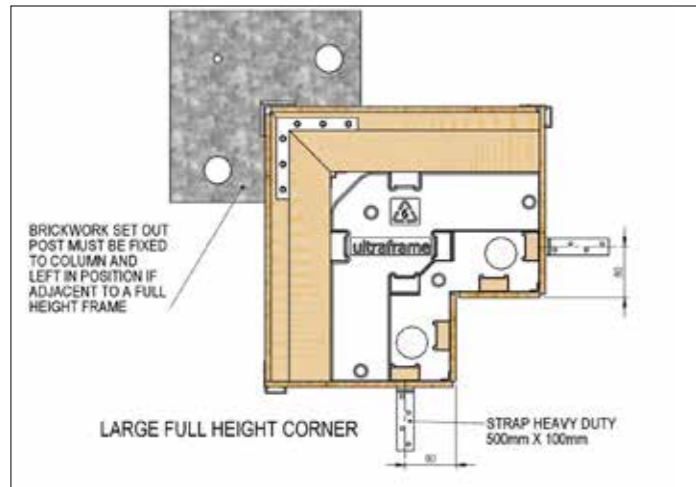

GENERAL NOTES ON COLUMN STRAPS:  
 1. Fixings to attach to columns are provided, but fixings for other substrates are not supplied.  
 2. NOTE: IF FIXING TO FINISHED FLOOR LEVEL, STRAPS MAY NEED TO BE SET INTO FLOOR.  
 3. If straps are specified, they must be fitted and in accordance with rules / centres outlined here.

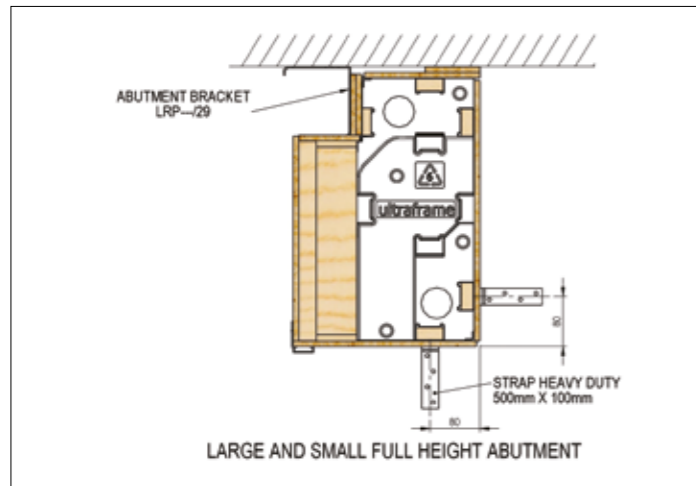



## STRAP POSITIONS ON DWARF WALL



ABUTMENT  
 Fasten straps down inside of wall of abutment column



LARGE 90° CORNER  
 Fasten straps down inside of walls of large 90° corner column

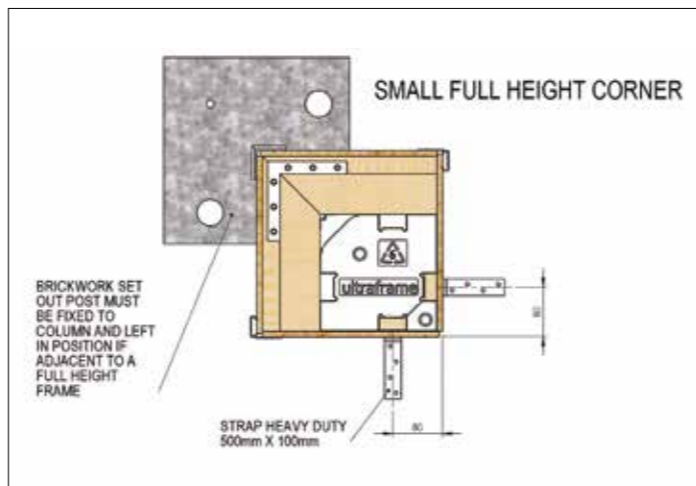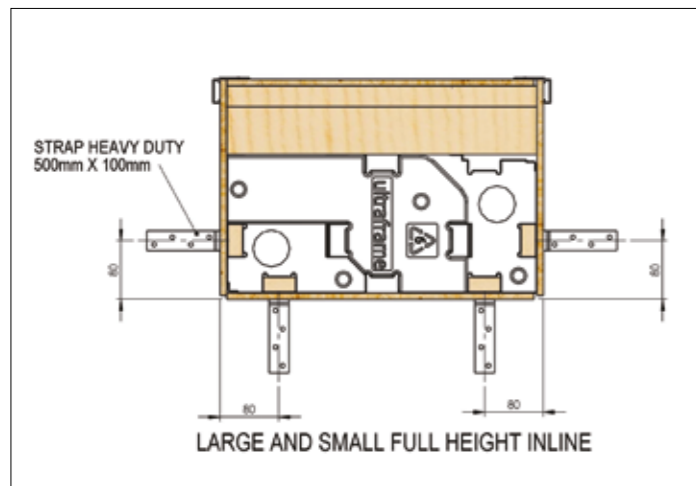

INLINE  
 Fasten straps down inside of wall of inline column. Use suitable fixing.




SMALL 90° CORNER  
 Fasten straps down inside of walls of small 90° corner column. Internal brickwork will require grinding to create relief for straps to cross over.

## STRAPPING ON 250MM DWARF WALLS




STRAPS **MUST** LINE UP WITH STUDWORK

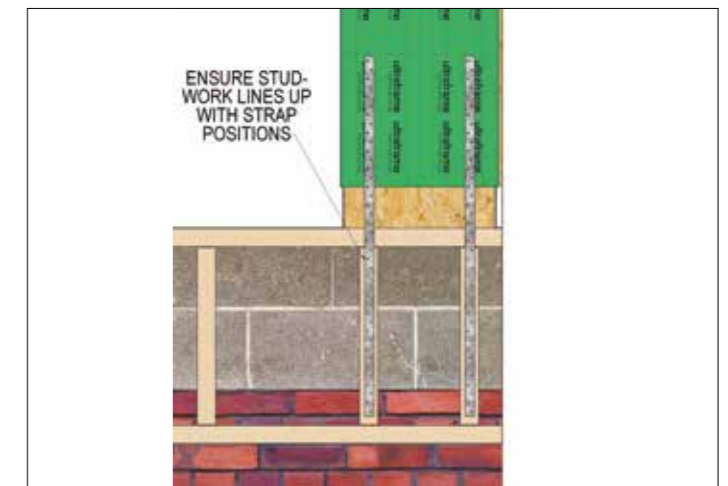

STRAPS **MUST** LINE UP WITH STUDWORK





## BRICK TIES AND STRAPS

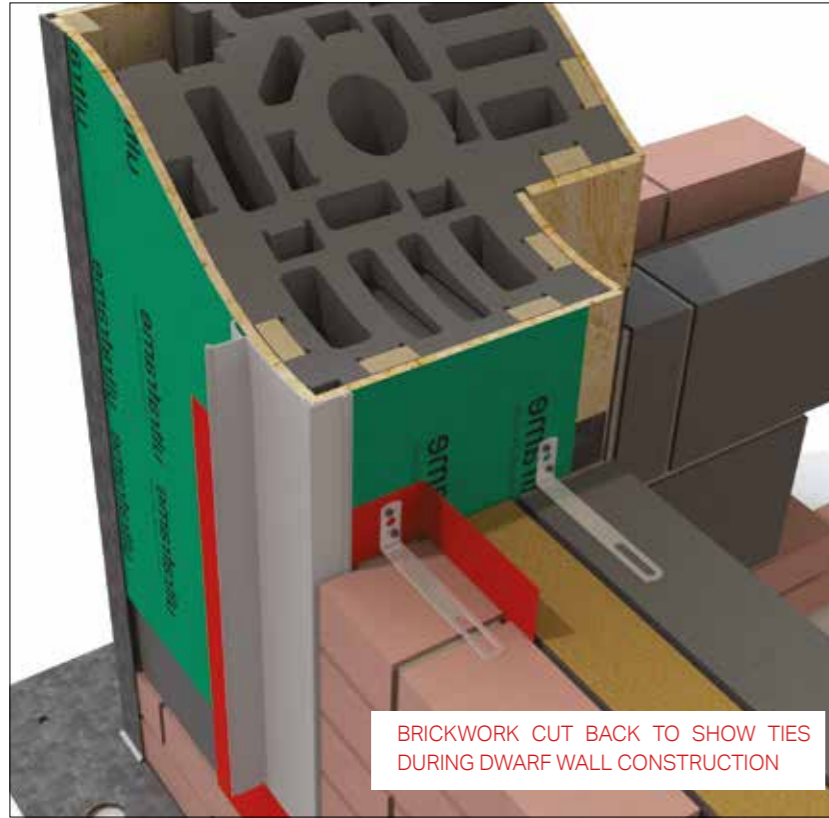


BRICKWORK CUT BACK TO SHOW TIES DURING DWARF WALL CONSTRUCTION


Temporarily remove brick set out spacer. Ensure that DPC is inserted as shown. Refasten brick set out spacer. Fasten brick ties into column as courses of brick are built. **NOTE: COLUMN TO BRICKWORK TIES SET AT MAX 300MM CENTRES ON BOTH INTERNAL AND EXTERNAL WALL MIN 2 NO. REQUIRED PER LEAF.**

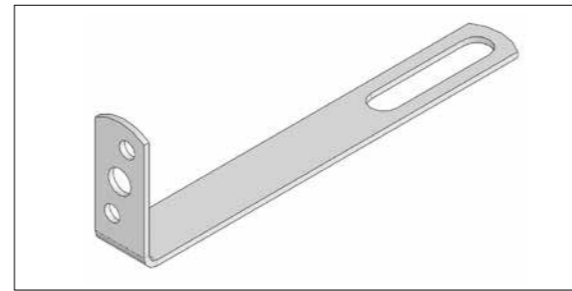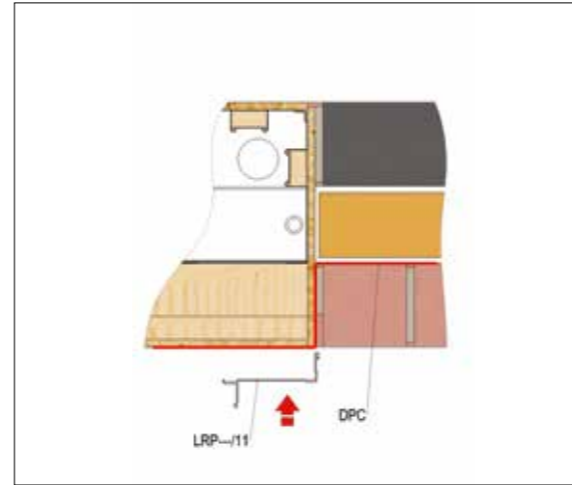


LRP026  
Column brick tie

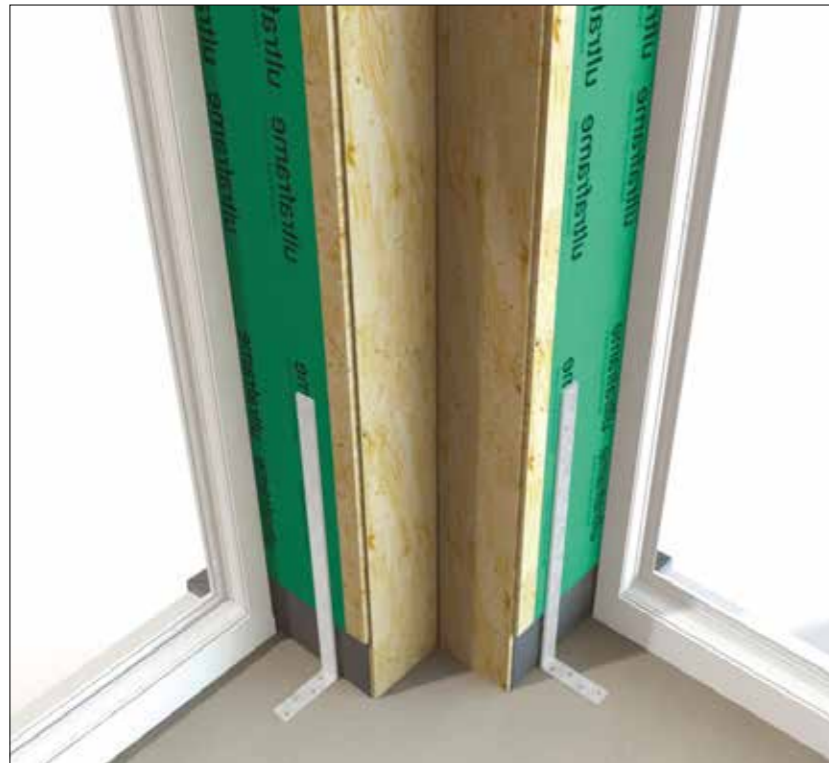

Minimum of 2 straps required. See installation guide for quantity and position of column. For columns on wall, LRP042 (straight support strap) is required running down inside of wall.

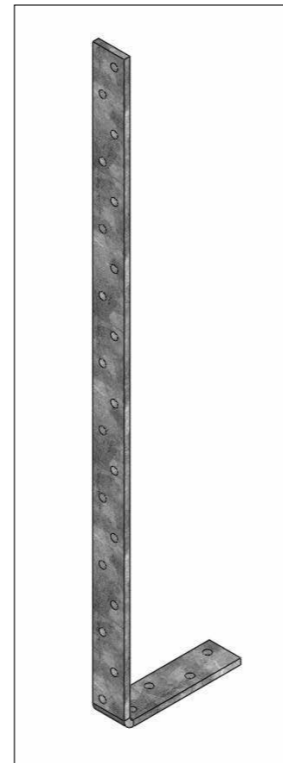


LRP027  
Column support strap tie

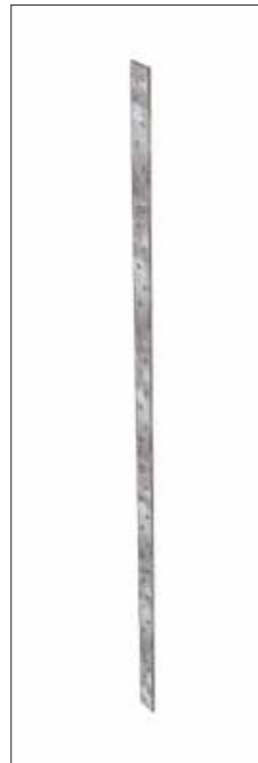

LRP042  
Column support strap tie (straight)

## COLUMN PLINTH POSITIONING / FINISHING

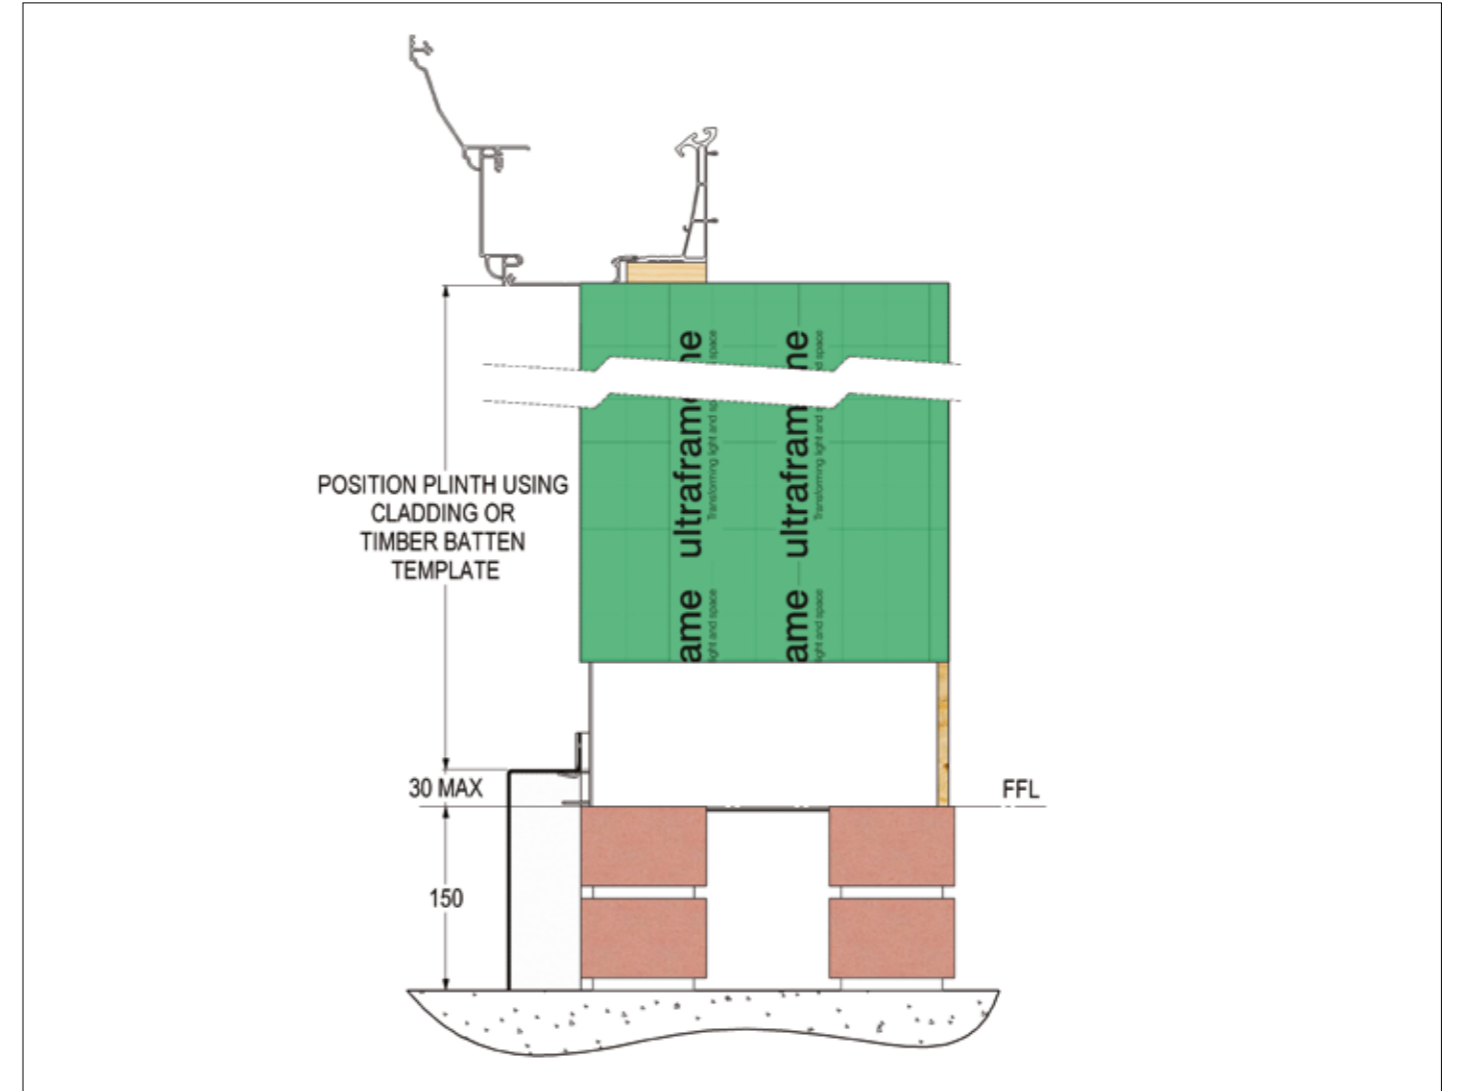

### Level Ground

- Measure cladding length to set the top of the column plinth.
- Measure down from underside of Cornice or cill for bespoke size.



### Sloped Ground


Position plinth against brickwork (to suit ground conditions). Mark through holes in plinth and then drill and plug wall. Screw plinth to wall.



Typical build with sloping ground conditions. The suitable dressing and landscaping with gravel or bark will finish this area, at the homeowners instructions.


## WINDOW AND DOOR INFORMATION

Turn to pages 24 / 25 for frame information on frame add ons around our door openings.

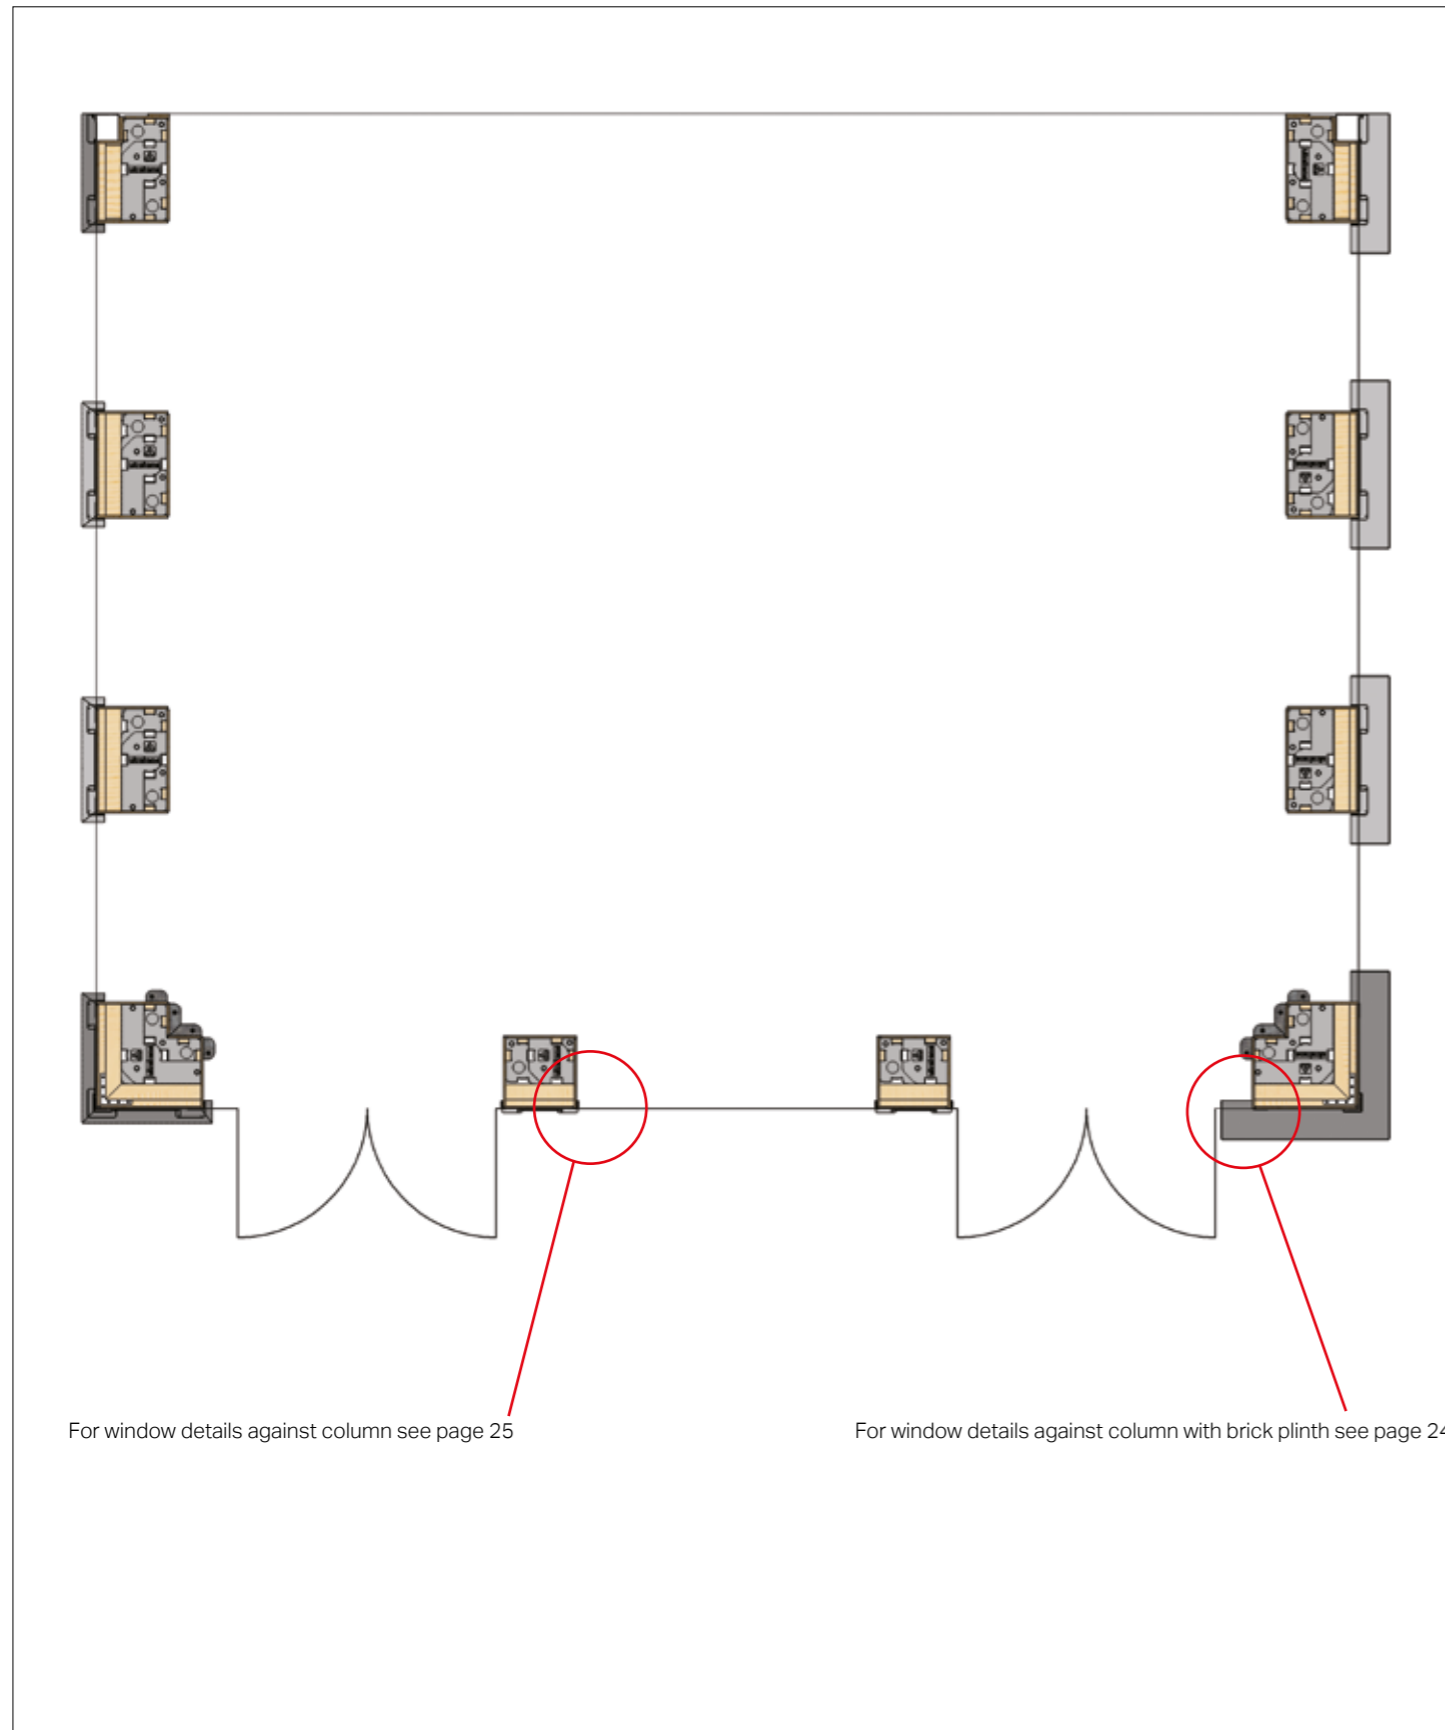



## INSULATED INTERNAL PELMET PERIMETER CEILING

Turn to pages 26 / 27 for frame information on detailing when the frame profile IS NOT 70mm

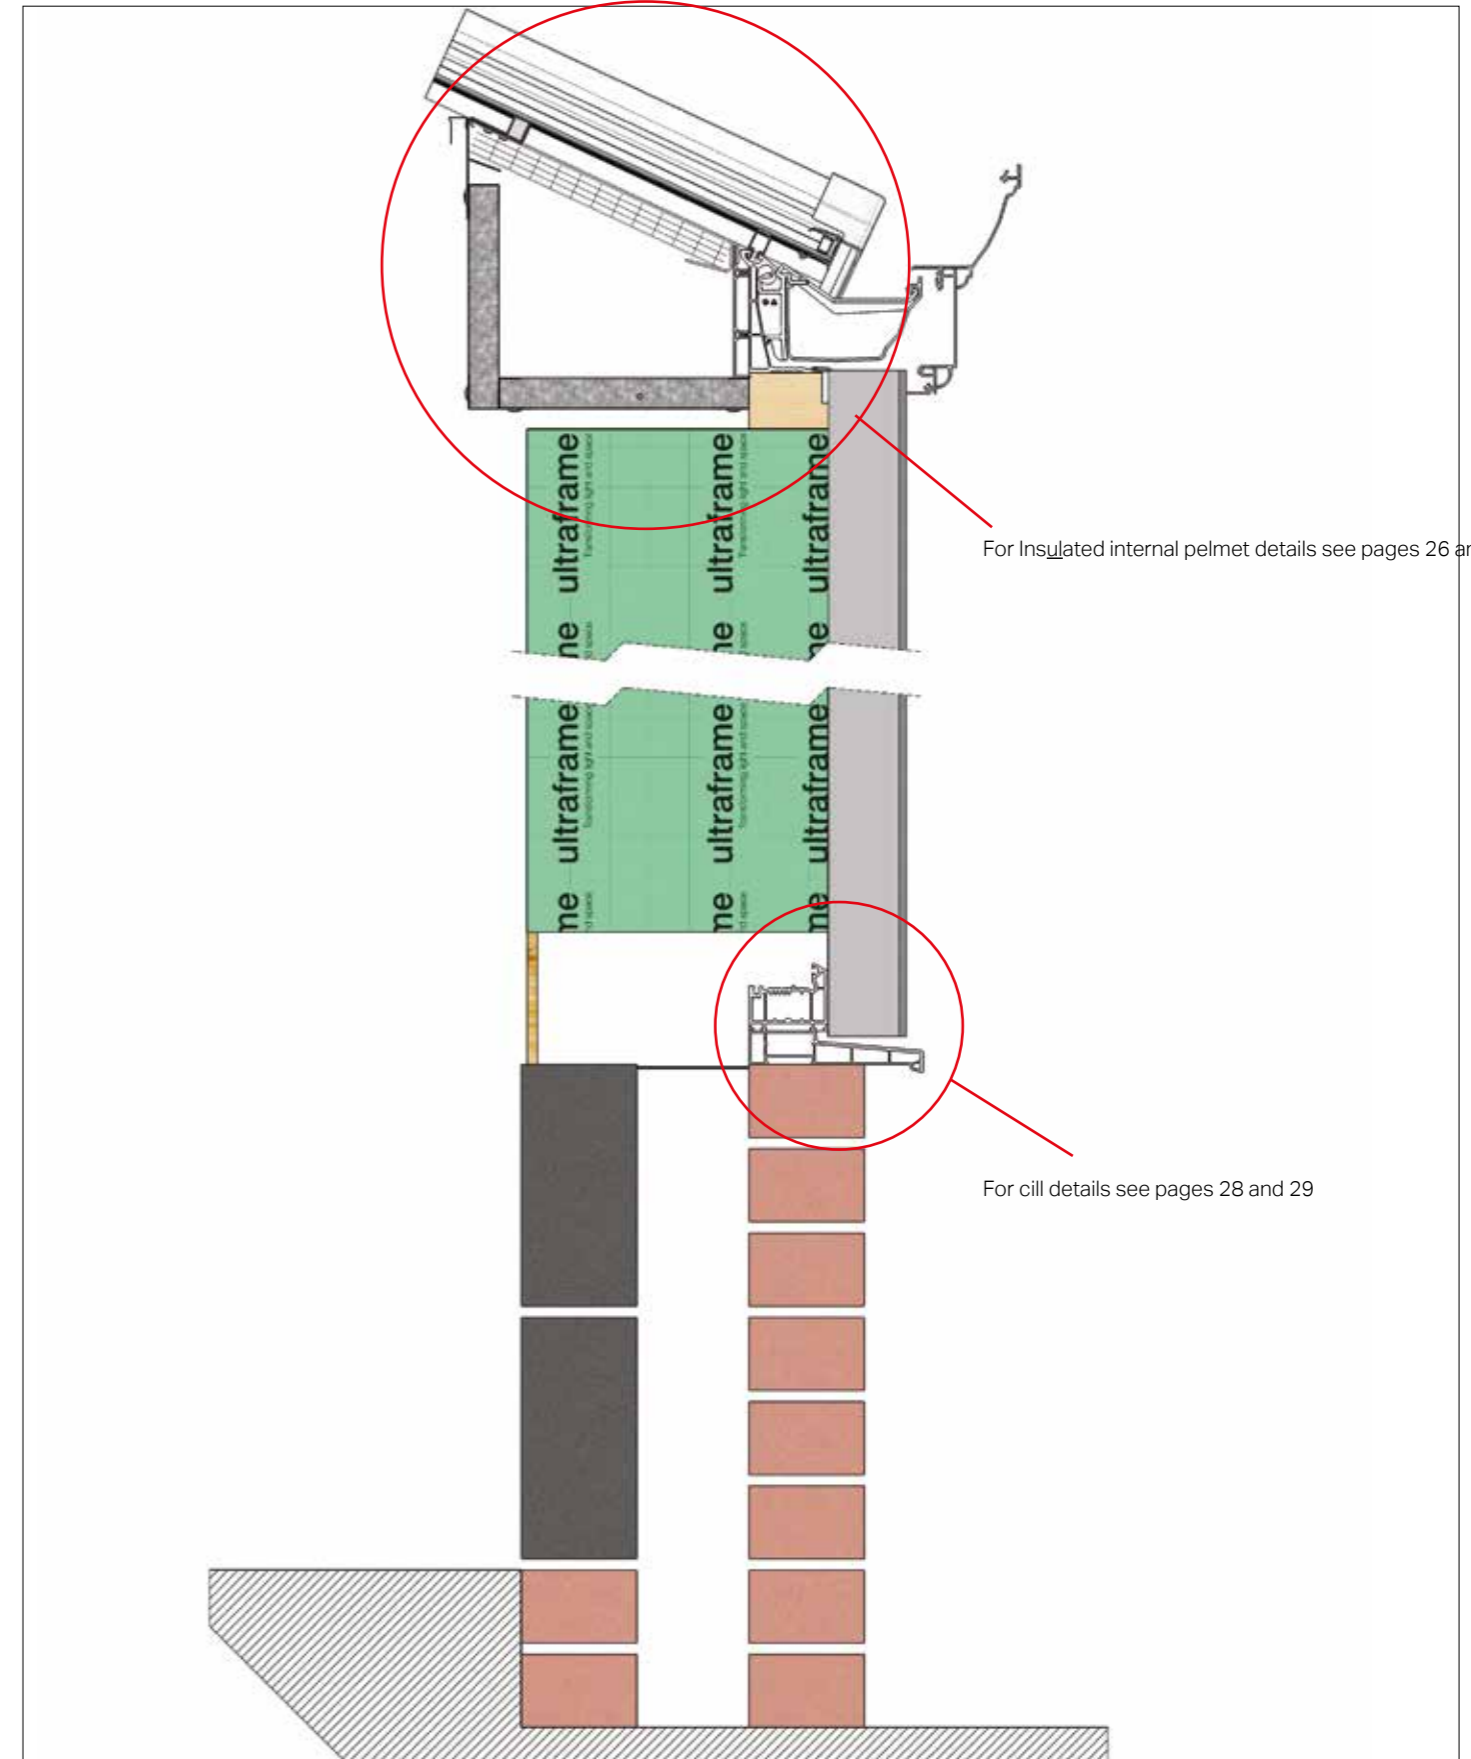




## WINDOW FRAME AND DOOR ADD ONS

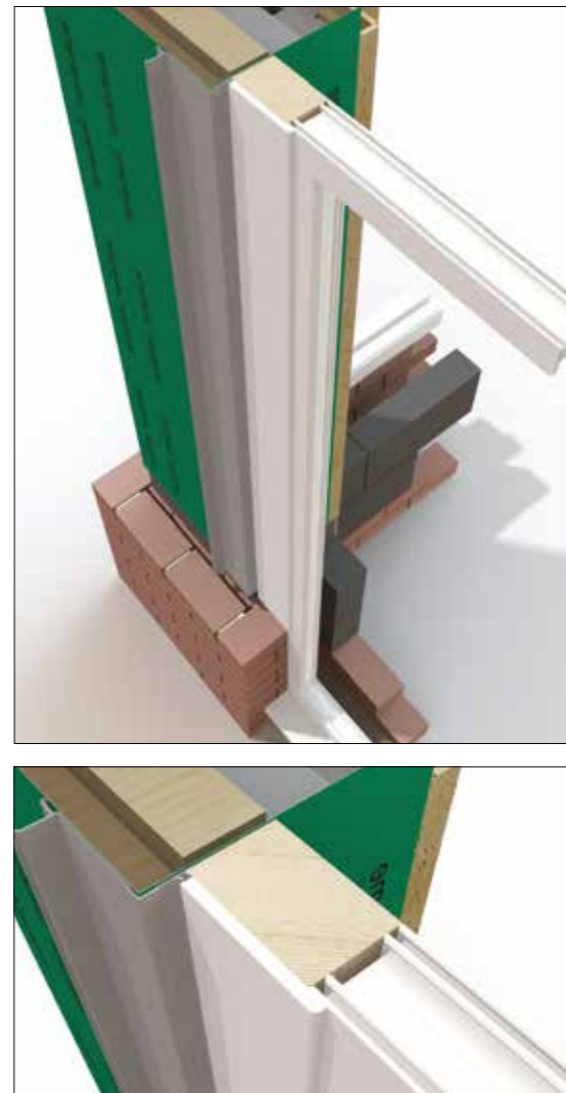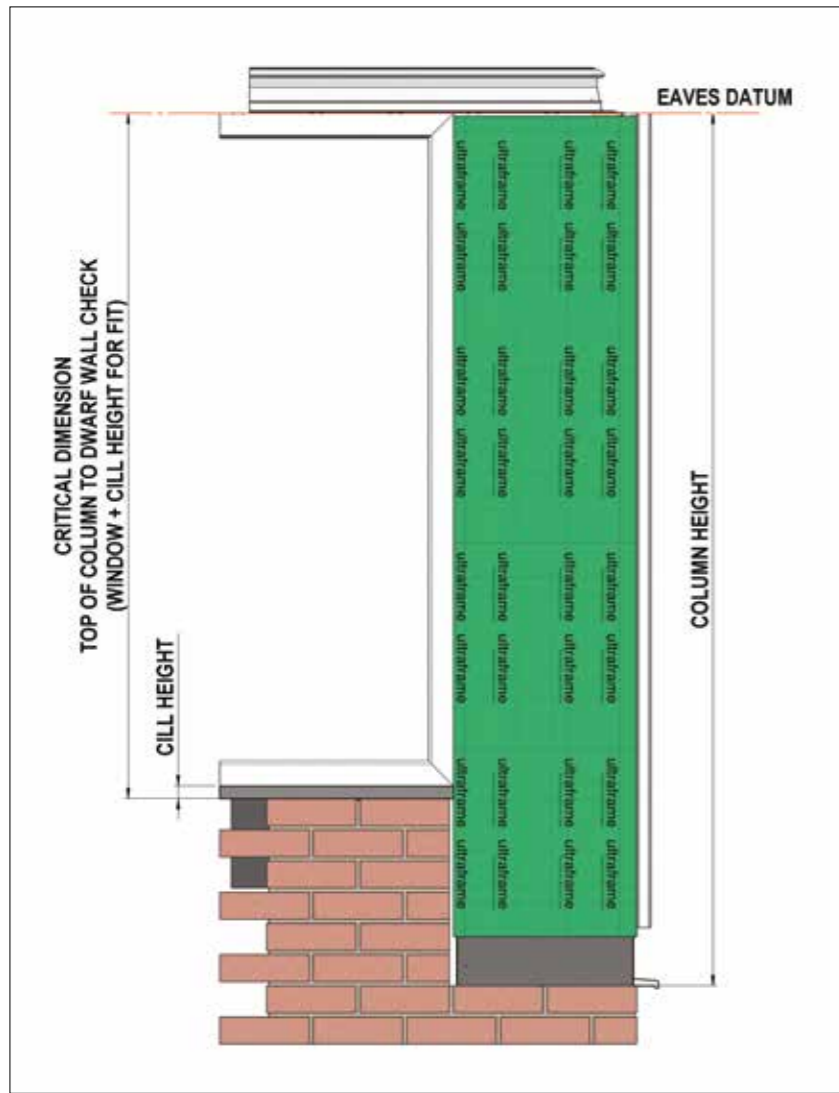

Frame add ons run between columns only and must not run over columns. Where brick plinths are specified, frames require packing with multiple frame add ons or timber and multiboard to space beyond brickwork. It is advisable to use a frame add on for a door next to a column to ensure that hinges do not foul. Check hinge position on door frames.


Pack detail shown between column and full height frame/door when using brick plinths above DPC level.

## WINDOW HEIGHTS

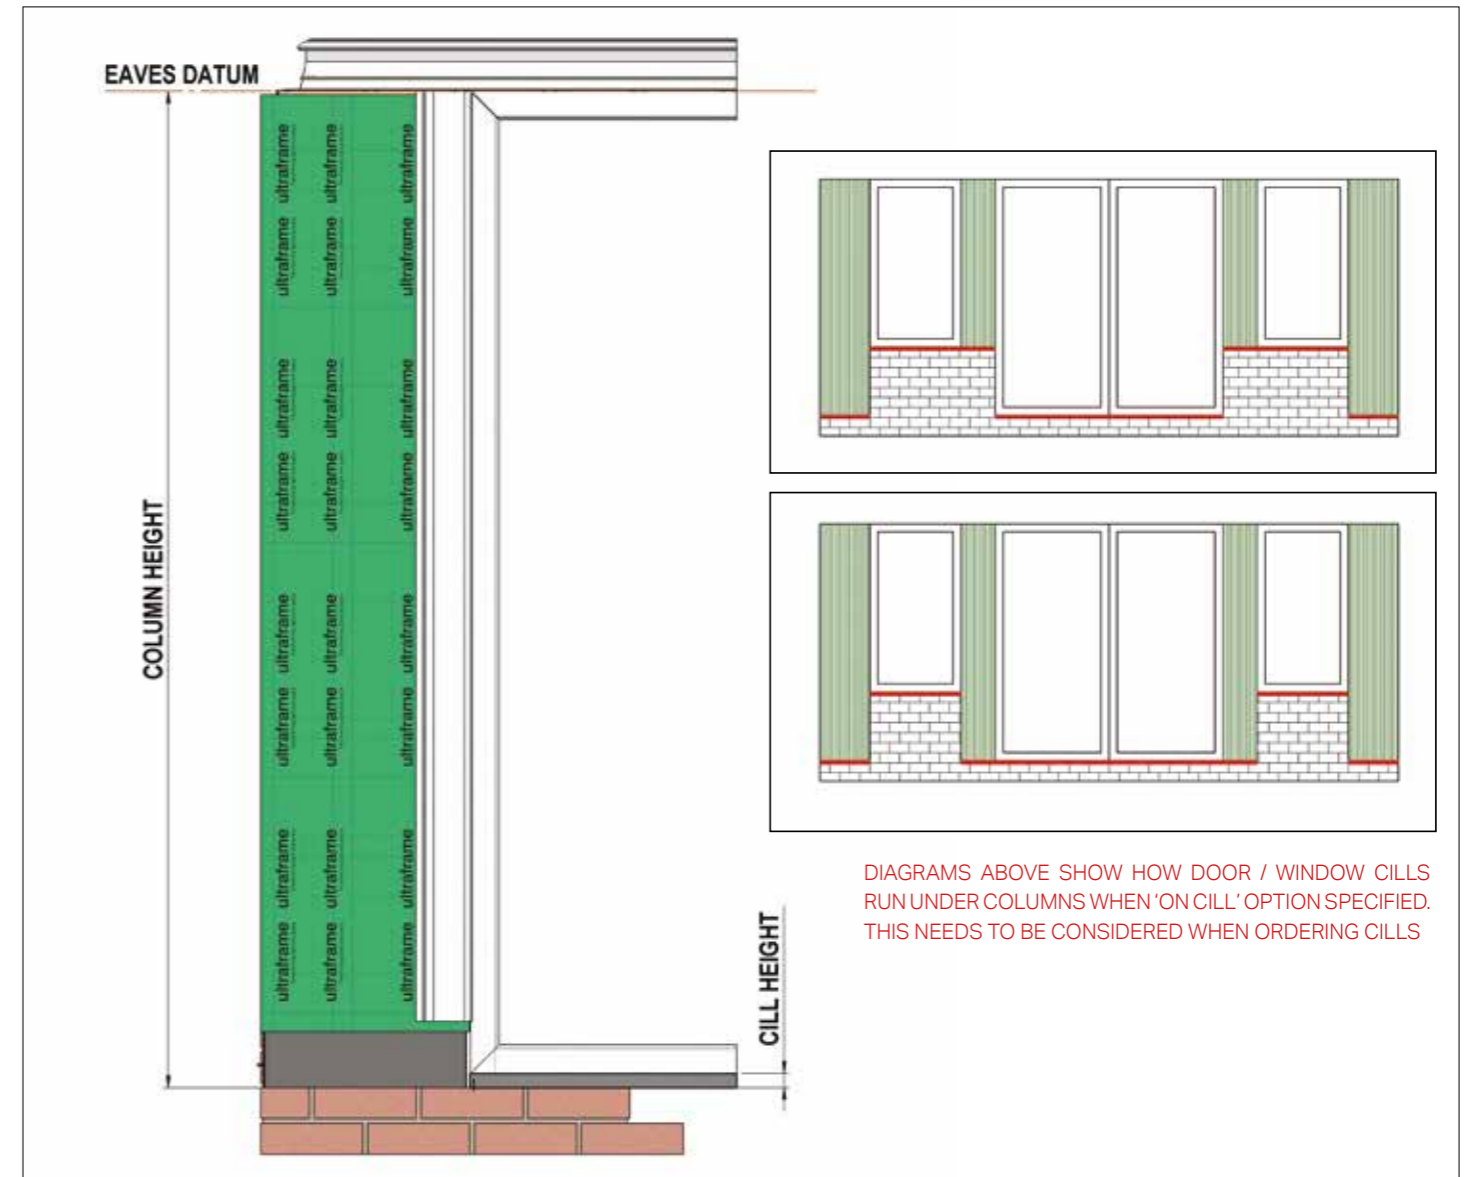


NOTE: Ensure when ordering frames based on column heights that overall height includes cills and frame add ons.  
RECOMMENDATION OF 5mm DEDUCTION OFF OPENING SIZE

## INSULATED INTERNAL PELMET ADD ON

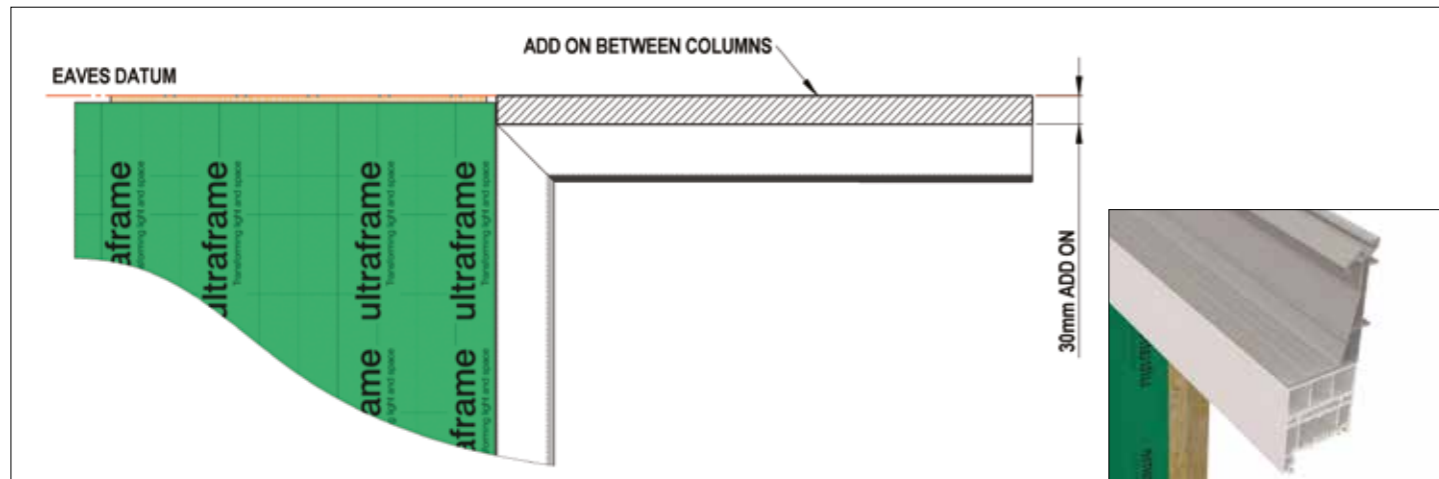

A 30mm (miniumum) add on required if specifying Insulated internal pelmet (below fascia) Add on only required between columns. NOTE: DO NOT RUN ADD ONS ONTO OR OVER THE COLUMN

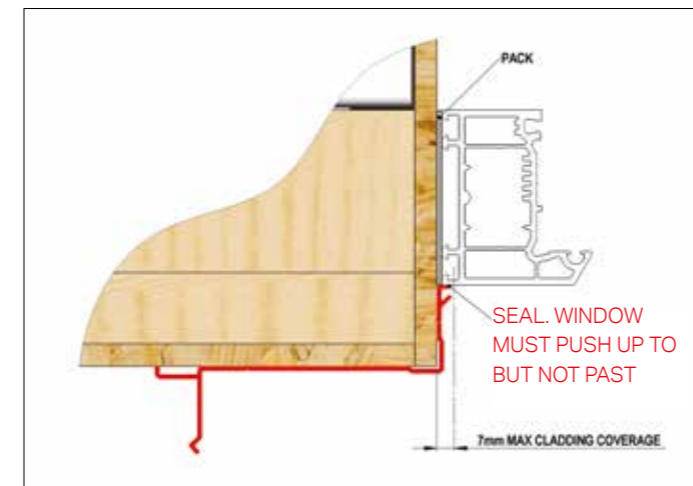


Fit windows against cladding clips as shown. Pack if required and seal against cladding clip. IMPORTANT: CLADDING ALLOWS 7mm COVERAGE



Fit and seal windows / doors against clips

## INSULATED INTERNAL PELMET WITH WINDOW FRAME SIZES LESS THAN 70MM


Insulated internal pelmet perimeter ceiling and super-insulated columns are designed for 70mm deep window frames. If using window frames smaller than 70mm, packing is required as shown in the figures below.

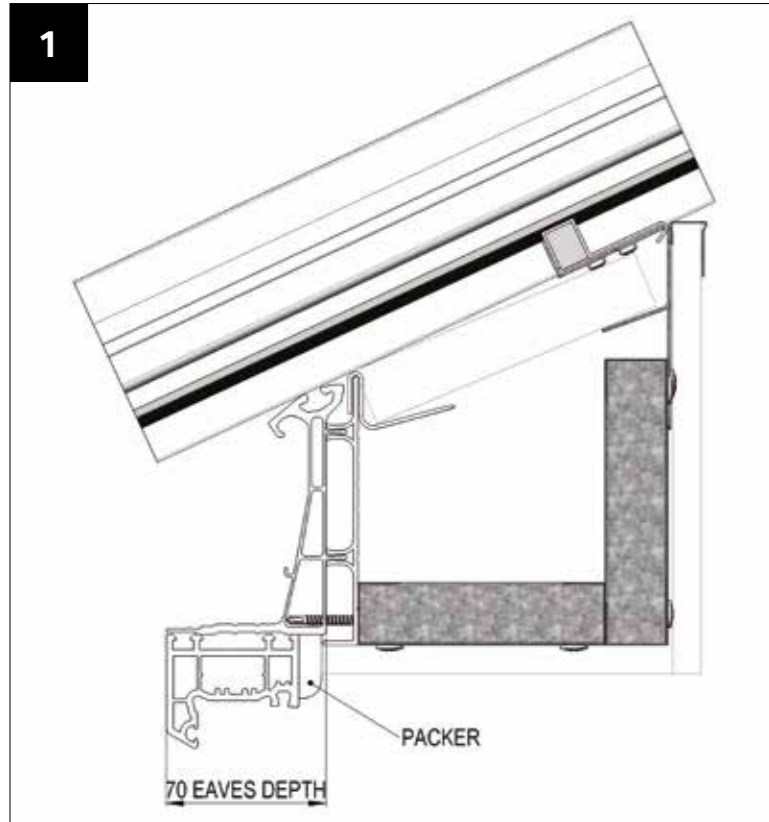

**ON FASCIA**  
Packer is required behind PFTB fascia board to stop it collapsing when fixing back horizontal Insulated internal pelmet framework. Packer can then be plastered up to.

Packer size = 70mm - frame size

**TIMBER PACKERS, TRIMS OR FRAME ADD ONS NOT SUPPLIED**

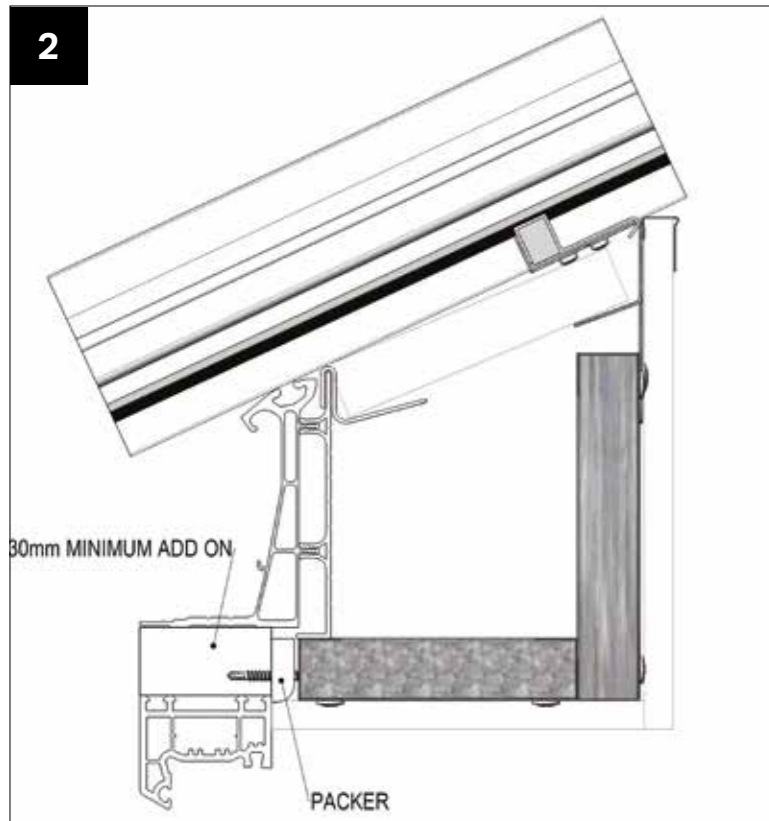



**BELOW FASCIA**  
Packer is required behind horizontal Insulated internal pelmet framework. Packer size = 70mm - frame size

**TIMBER PACKERS, TRIMS OR FRAME ADD ONS NOT SUPPLIED**

## INSULATED INTERNAL PELMET WITH WINDOW FRAME SIZES GREATER THAN 70MM


Insulated internal pelmet perimeter ceiling and super-insulated columns are designed for 70mm deep window frames. If using window frames larger than 70mm the insulated internal pelmet frame requires reducing to suit.

Contact Ultraframe technical support so that adjustments can be made to the framework.

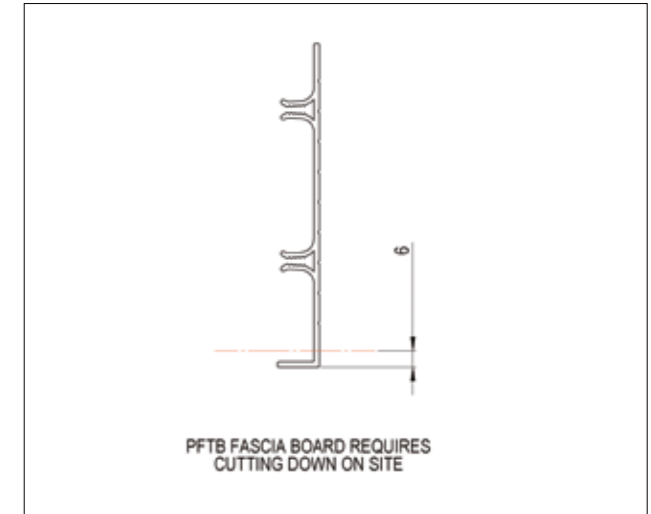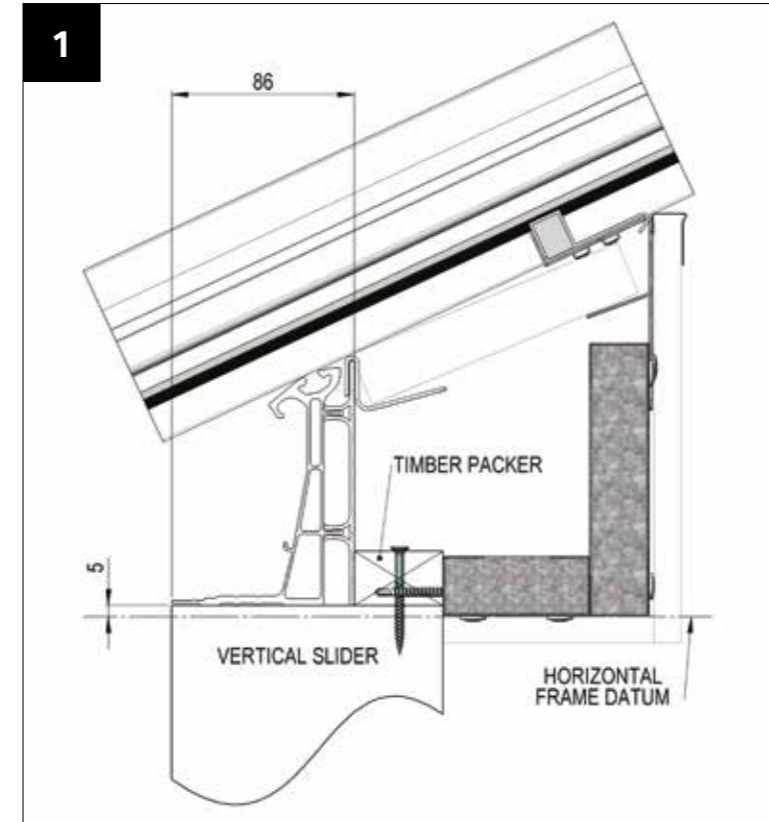

**ON FASCIA / VERTICAL SLIDER**  
1. PFTB Fascia requires cutting down by 6mm as shown above.  
2. Overall eaves size, including PFTB is 86mm.  
Timber packer required = Frame depth - 86  
3. This size is also the deduction for Insulated internal pelmet horizontal frames

**TIMBER PACKERS, TRIMS OR FRAME ADD ONS NOT SUPPLIED**

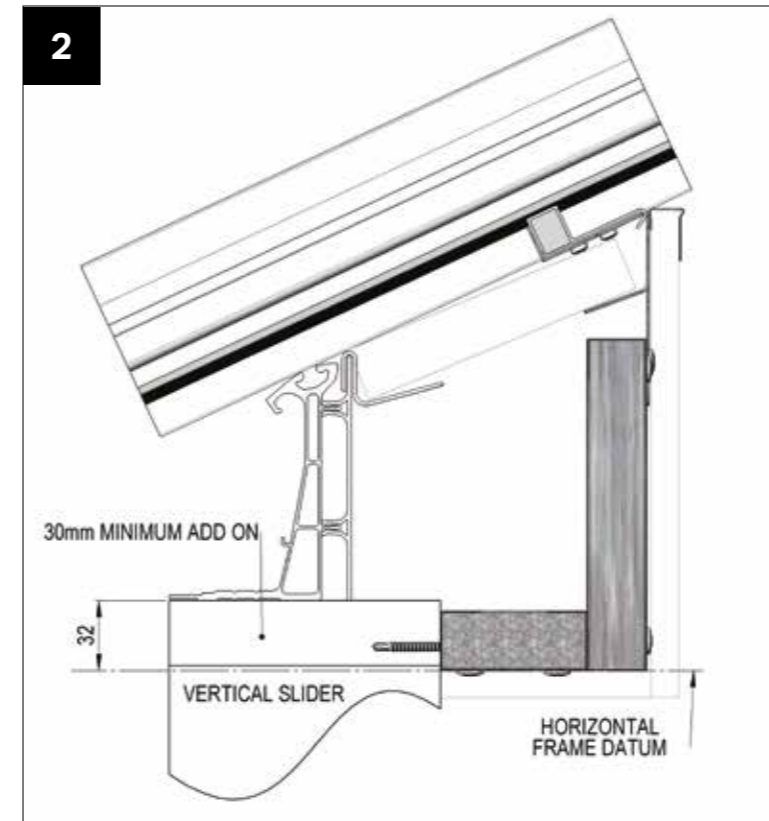


**BELOW FASCIA / VERTICAL SLIDER**  
1. 30mm (minimum) add on is required above frames (as shown)  
2. Horizontal frame is positioned 32mm below the underside of the eaves beam.

**TIMBER PACKERS, TRIMS OR FRAME ADD ONS NOT SUPPLIED**




CILL OPTIONS - 130MM ALUMINIUM CILL (ULTRAFRAME SUPPLIED)

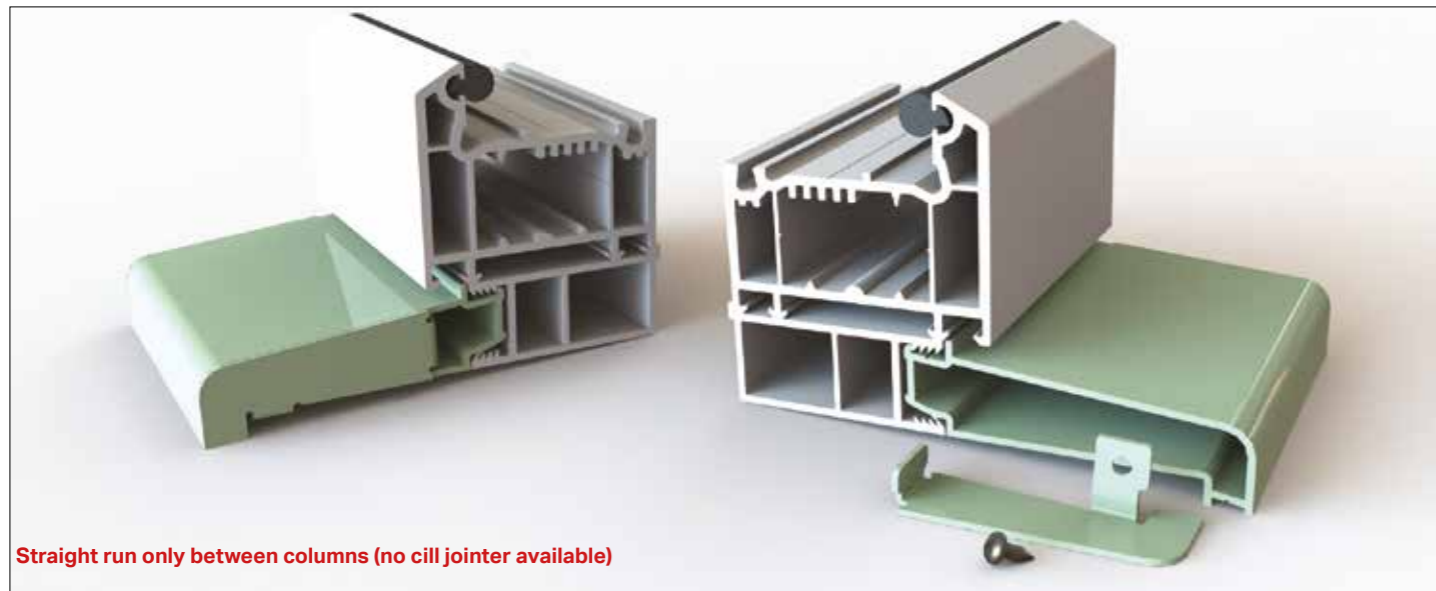


**Straight run only between columns (no cill jointer available)**

130mm aluminium cill with endcaps. This is supplied (when ordered) by Ultraframe.

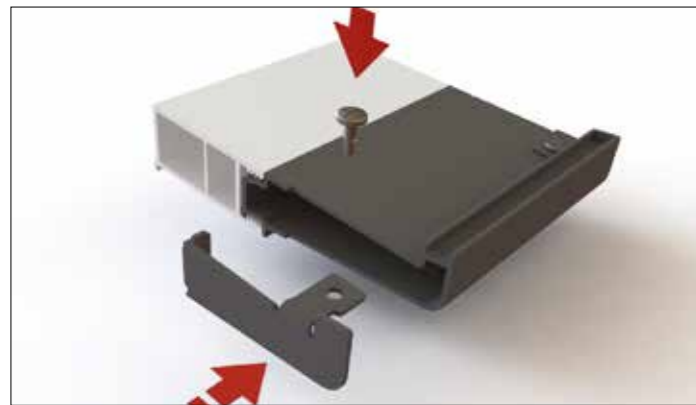

Attach endcaps as shown using self drill screw supplied.

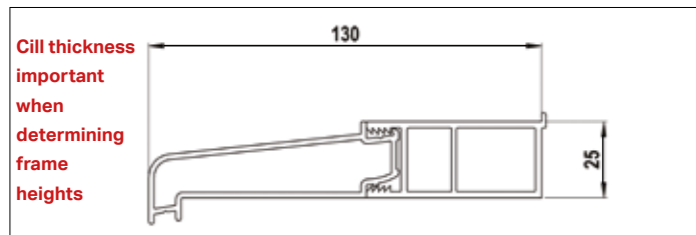


Overall dimensions of cill



Used between columns



130mm cill has been designed so that it runs into the column claddings without any overhang or requirement for endcaps.

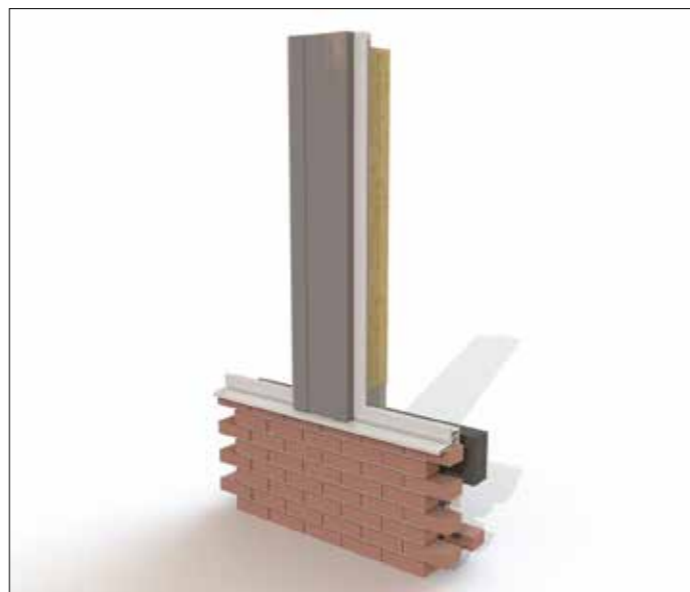


Inline column on wall


CILL OPTIONS - 150MM PVCU CILL (NOT SUPPLIED BY ULTRAFRAME)





150mm PVC cill against large column. Endcaps are required as cill will overhang the column claddings

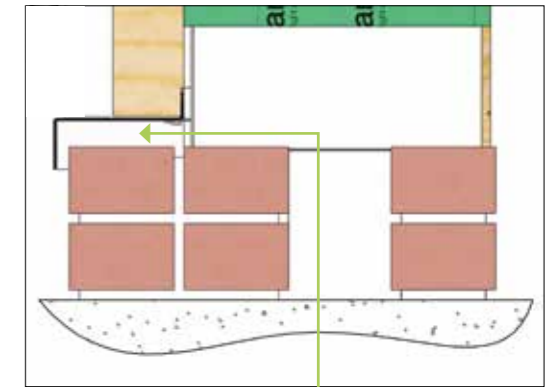

PACK TO SUIT

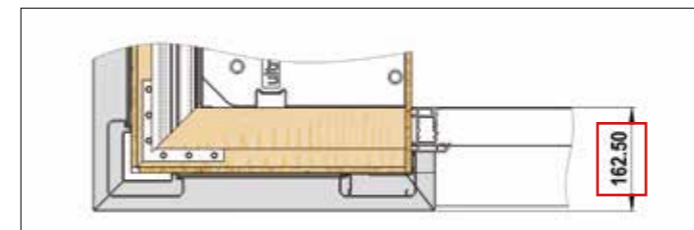


150mm cill against plinth. Both large and small plinths are the same projection

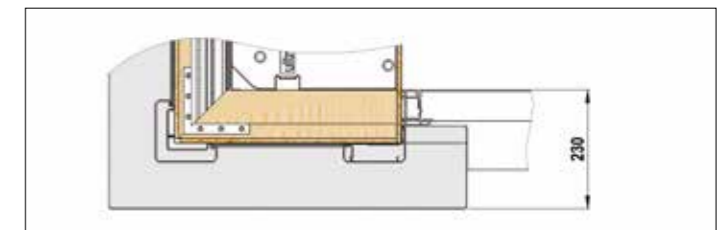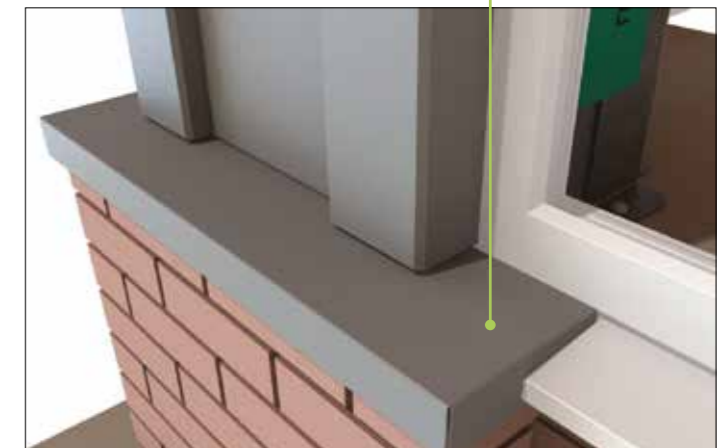


150mm cill against the brick plinth cap. Both large and small brick plinth caps are the same projection

CILL DETAILS AT TOP OF COLUMN

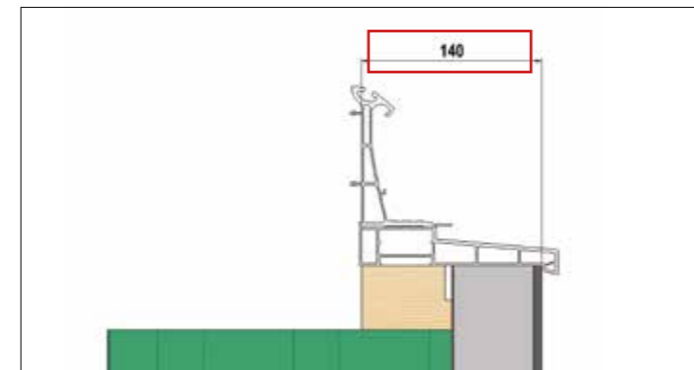

**Large**

Large column claddings require a minimum clearance of 140mm from internal frame line. Ensure that drip profile on nose of cill overhangs claddings sufficiently.

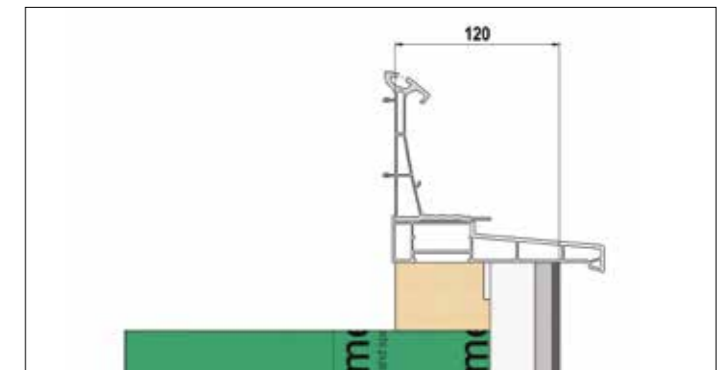

**Small**

Small column claddings require a minimum clearance of 120mm from internal frame line. Ensure that drip profile on nose of cill overhangs claddings sufficiently.

## CORNICE DETAILING



Hipped end



Self manufactured furring\* - see illustration B on p31



Hipped end with abutment



Self manufactured furring with abutment. This design uses Ultraframe's Gable support beam - see illustration B on p31




Raked frame - see illustration A on p31


Options	Full return hip	Full return furring	Raked FR Short return SM infill wedge
Full height/dwarf walls	✓	✓	✓
Standard eaves	✓	✗	✗
Gable beam	✗	✓	✗
Inline columns	✓	✓	✗
Abutment columns	✓	✓	✗
Concealed downpipe	✓	✓	✗
Raked frames	✗	✗	✓
Furring*	✗	✓	✓

\*Cannot be used with Classic low pitch or Ultraframe's own firrings.

## CORNICE AND RAINWATER PIPE POSITIONING

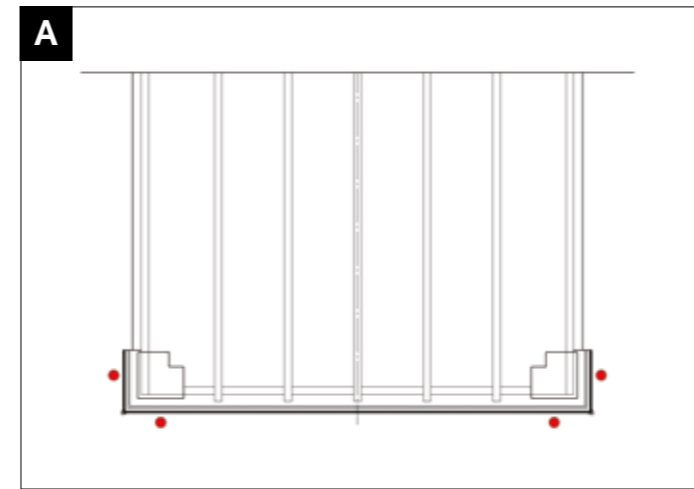

**A** SHORT RETURN GABLE. If unable to return back to house wall use Elephants Trunk outlet (Cornice) or inline outlet for 67° obtuse round (cill) positioned centrally on column in one of the positions shown.

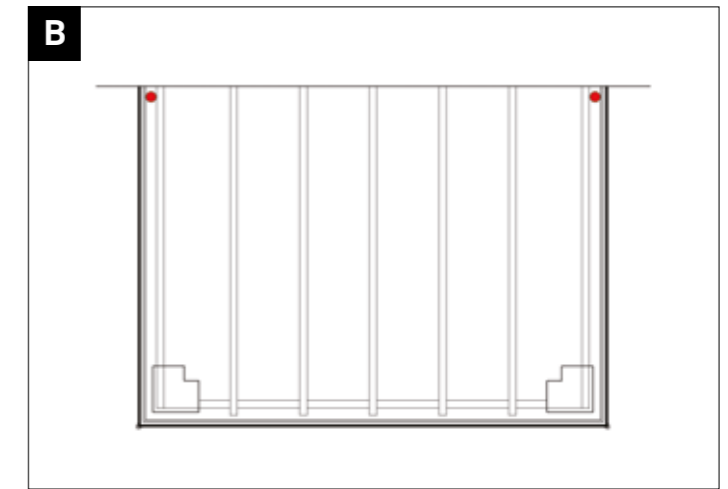

**B** FULL RETURN GABLE. If no abutment column is specified or abutment column is not full height, use Elephants Trunk outlet (Cornice) or inline outlet for 67° obtuse round (cill) positioned centrally on column. Alternatively return the guttering to the house wall.



SHORT RETURN WITH CORNICE. If unable to return back to house wall use Elephants Trunk outlet positioned centrally on column.



SHORT RETURN WITH CILL. If unable to return back to house wall use inline outlet for 67° obtuse round, positioned centrally on column.

NOT RECOMMENDED



**1** Return to house wall applies to both Cornice and cill. Return Cornice and guttering along host wall.



**2** Elephants Trunk outlet. If it is not possible to have full height columns ie on dwarf wall.




**3** Concealed downpipe. Only available for full height columns. Requires specific base detail. (See page 13)




## COLUMN WIRING AND CABLE DUCT POSITIONS


Any wiring must be completed by a qualified electrician and in accordance with latest IEE Regulations.

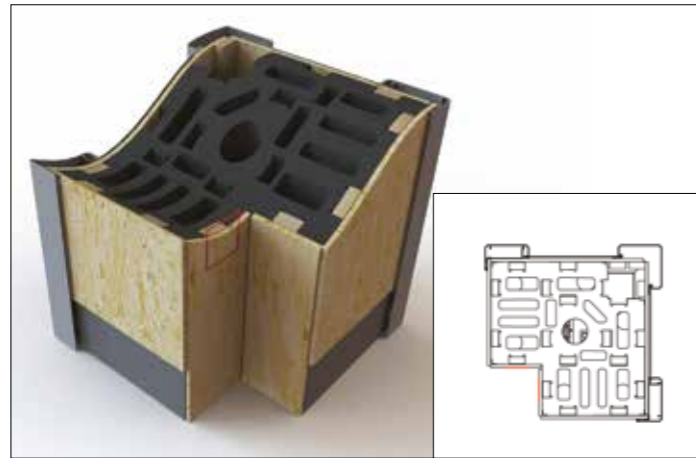


Mark position of back box central to face

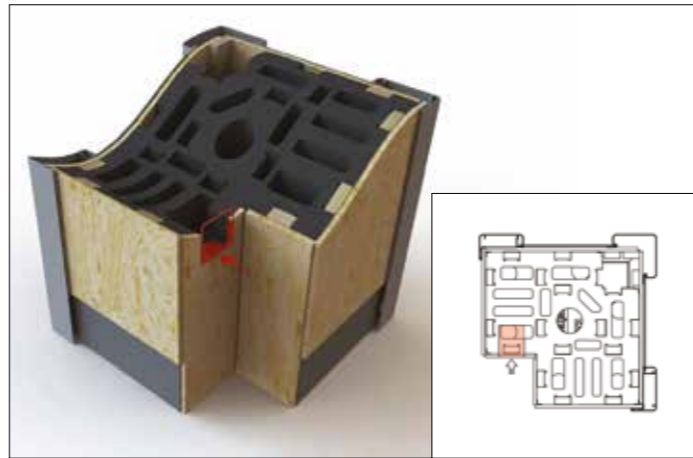

Drill and cut through OSB, batten and polystyrene into chamber as shown.

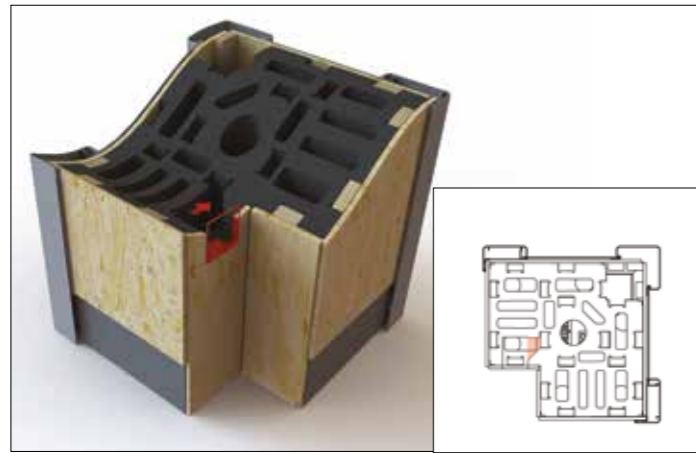


Using fingers or screwdriver, break through polystyrene wall into internal chamber

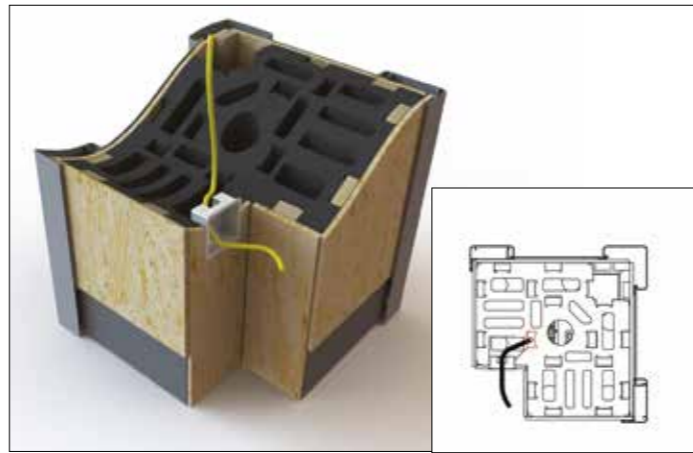


Feed cable down column through chamber shown and out through cutout.


## WIRING - POCKET POSITIONS

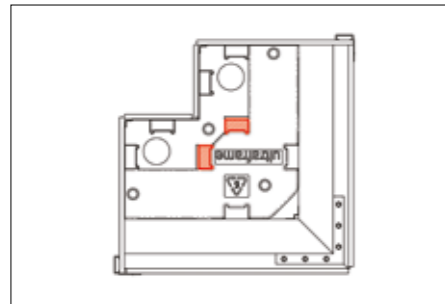


90° Corner column large

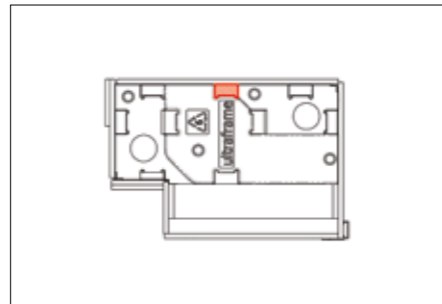


Abutment column large

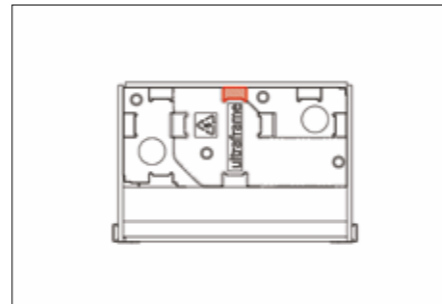


Inline column large

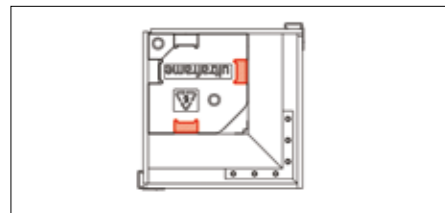

90° Corner column small



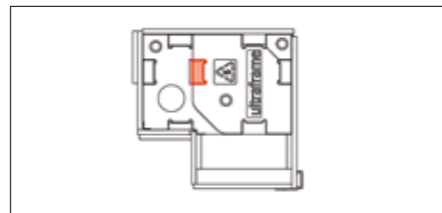


Abutment column small

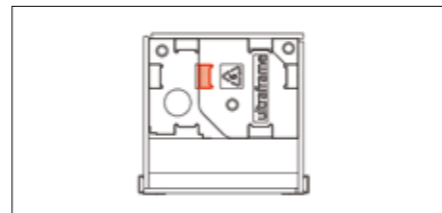


Inline column small


## HEATER - SEE SEPARATE DATASHEET

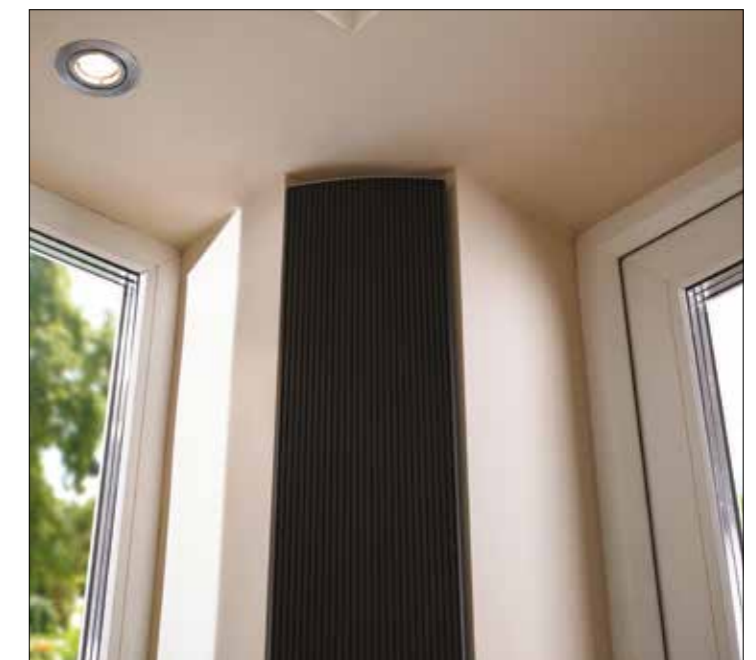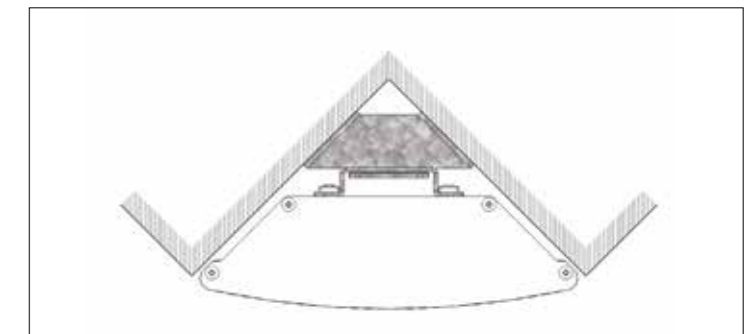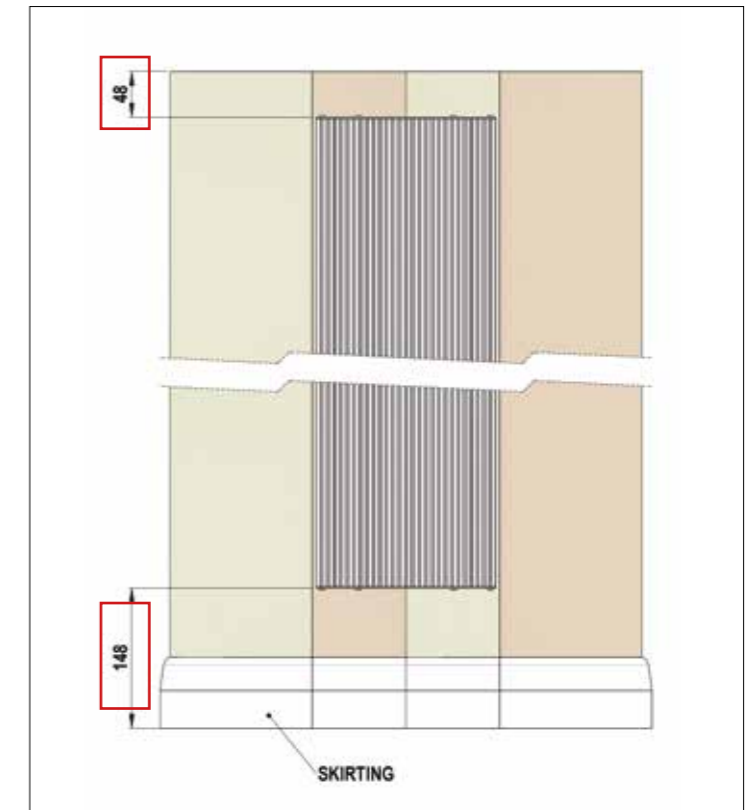


# PLASTERBOARDING

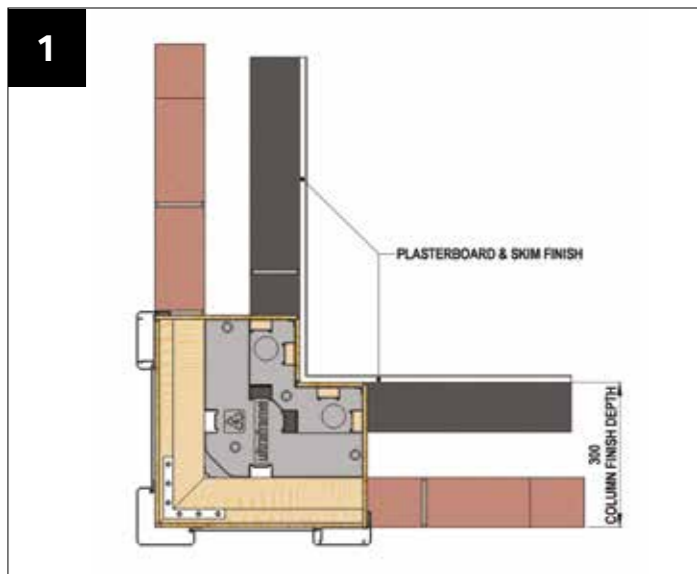


**300mm WALL**  
Plasterboard directly to column and wall

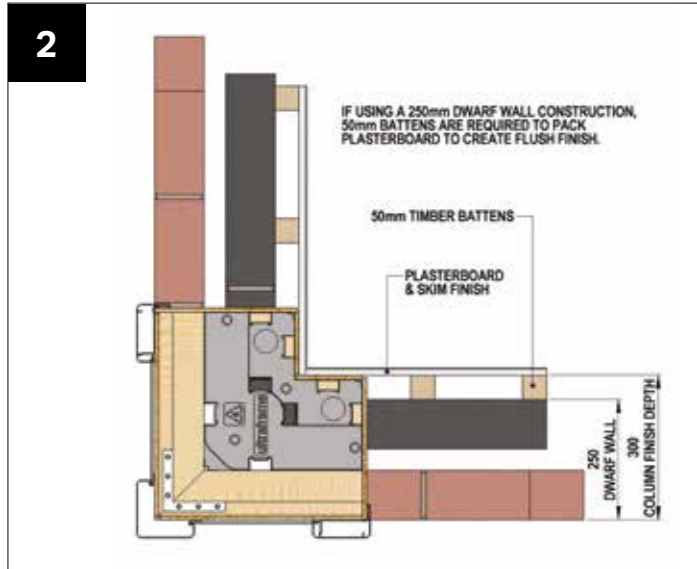

**250mm WALL**  
If using a 250mm wall, pack out plasterboard 50mm from column as shown

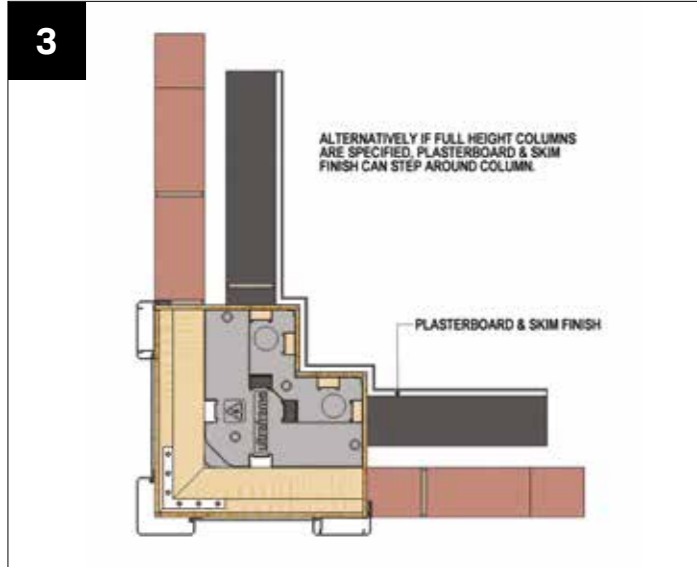


**250mm WALL (full height columns)**  
If using full height columns with a 250mm wall, plasterboard can be stepped around the columns as shown.

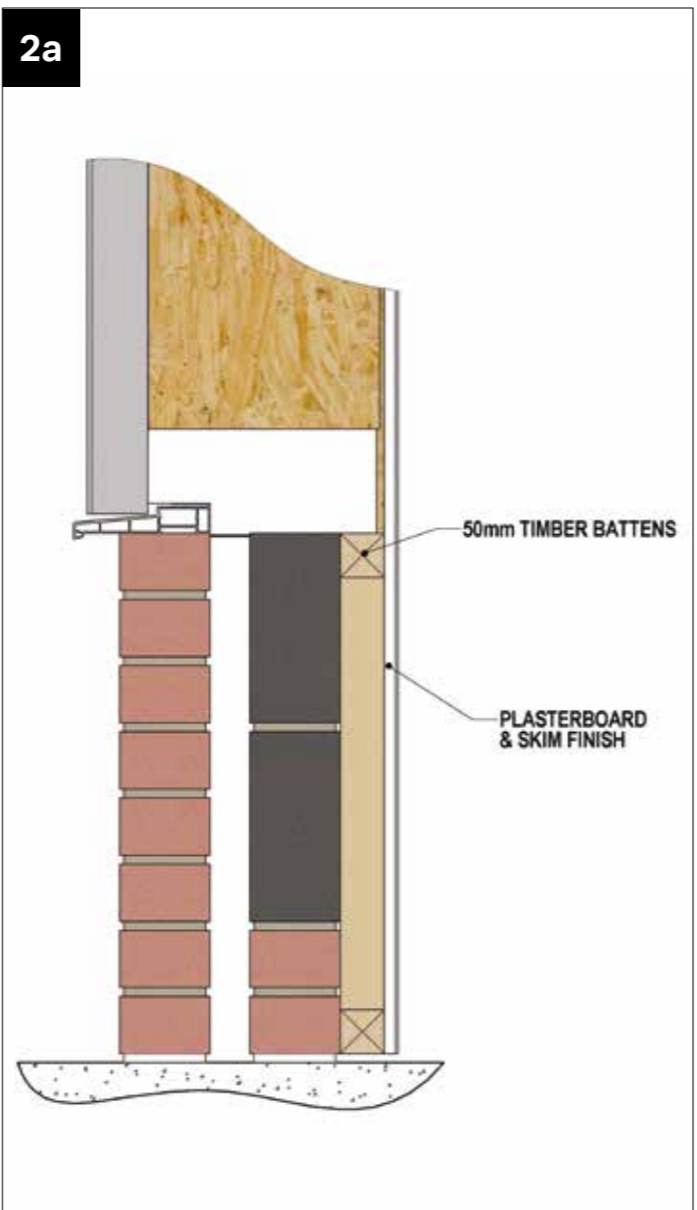

NOTE: 12.5MM FOIL BACKED PLASTERBOARD SHOULD BE USED WHEN BOARDING COLUMNS

# COLUMN INTERNAL FINISHING

Clearly showing interface between super-insulated columns column, insulated internal pelmet perimeter ceiling and roofing members.

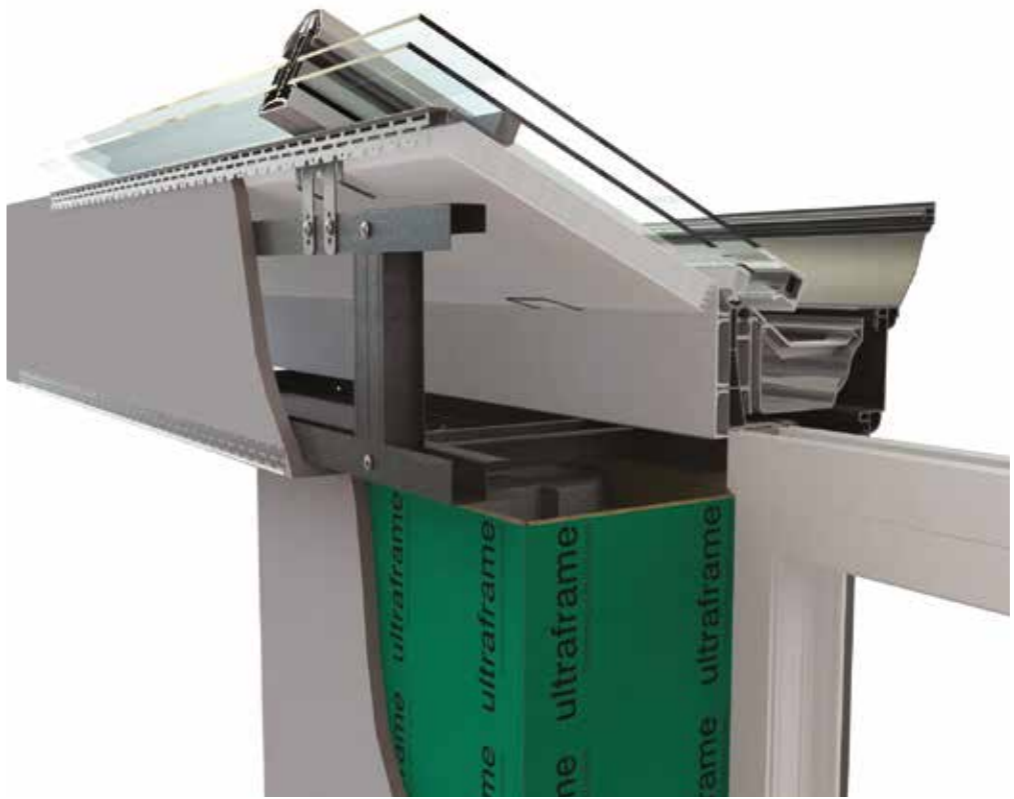

Suggested finish if Insulated internal pelmet NOT specified



Timber Cap - exact finish at fitters discretion

CAPPING NOT SUPPLIED




## GOAL POST GENERAL ARRANGEMENTS

Please accept this general guidance - always 'engage' Ultraframe's Technical Support Team Structural Engineer at the earliest possible stage - call 01200 452918 or email techsupport@ultraframe.co.uk




Typical reinforced and bolstered eaves beam ready to accept wide bifolding doors.

**NOTE:** Door frame should line up with outside of eaves beam to ensure that column claddings are not obstructed when fitted. The door is pushed against the column cladding clips and sealed down its length. Maximum frame depth of 80mm. If greater than 80mm, contact Ultraframe Technical Support Team for assistance.

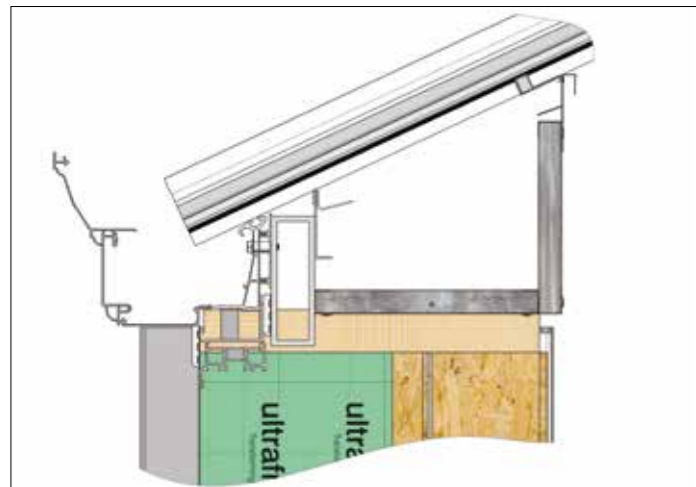

Some on site finishing may be required - notching and cladding.

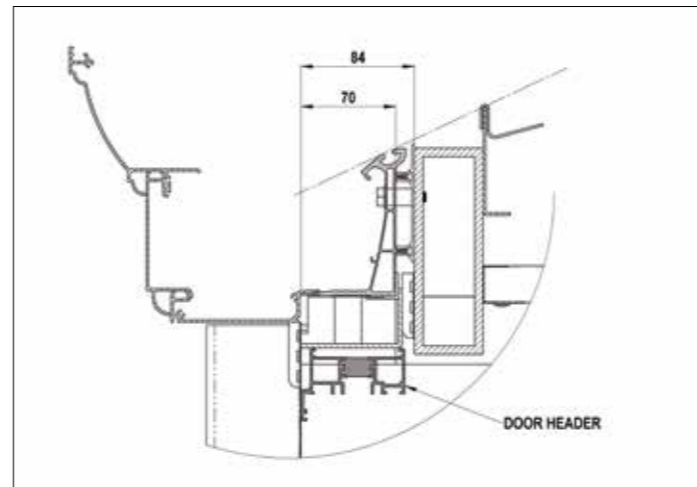

Area between Cornice / cill and door header frame will require cladding by the fitter on site.

## PAINT FINISH AND COLOUR OPTIONS

### Colour Options

Super-insulated columns and Cornice are available in two whites and these standard colours on a standard lead time (defined as the roof lead time).

DEEPLAS WHITE	CLASSIC WHITE	GREEN	PURE CREAM	ANTHRACITE GREY
INTERPON SC050E	RAL 9003	BS14C35	RAL 1015	RAL 7016
GLOSS 80%	GLOSS 80%	GLOSS 80%	GLOSS 30%	GLOSS 30%

Alternatively, and at an extra cost, super-insulated columns and Cornice can be available in a wide range of RAL specified colours.

#### RAL colour chart



The Classic Roof can also be supplied in aluminium too, for perfect integration of materials and finishes.

Super-insulated columns and Cornice use architectural grade powder coating for the final paint finish.

There is a standard range of colours and in addition special RAL colours can be ordered (price on application). For marine environments, a special coating can be arranged if required and this will attract an additional charge - please notify Ultraframe at quotation stage.

Polyester powder coatings are not maintenance free - the extent of cleaning depends upon the local environment and the attitude of the consumer/homeowner. If the consumer wants a finish like a regularly cleaned car, then clearly regular cleaning is required. Stubborn marks should be removed by using a soft cloth and a renovating cream like CIF - once dry buff. For added protection, a wax polish can be applied up to twice per year. All paints will 'chalk' to some extent and there will be a reduction in gloss level over time.

Quality expectations on installation.

- Appearance. This is assessed based on the selection of the 'significant' (primary) surface. From a distance of 3m, stand at an oblique angle of 60degree and then defects such as blisters, runs, pin holes etc should NOT be seen.
- Colour and gloss. Viewed from 5m, the coating must be of even colour and gloss with good coverage.



Standard colour Pure Cream



Standard colour Landmark, Sage or Chartwell Green



Standard colour Anthracite Grey

# ORDER FORM

## Super insulated columns

**ORDER** e: roofsales@ultraframe.co.uk  
 **QUOTE ENQ** e: quotes@ultraframe.co.uk

ACCOUNT No.   
 Company Name .....  
 Order Number .....  
**JOB REFERENCE** .....  
 Company Contact .....  
 Telephone No. ....  
 Email .....  
 Delivery Address .....

**POSTCODE** .....  
 Delivery Date Req .....  
 Quotation Ref .....

**CRITICAL INFORMATION**  
**\*Required for structural snow / wind loading**  
 \*Site Postcode .....

**CUSTOMER NOTE: Please carefully read the System Overview and Design Guide before filling in order details**

### HOW TO PLACE AN ORDER FOR COLUMNS

1. Sketch the plan and elevations ensuring all angles are 180/90°. Mark windows, doors, host walls, outlets and column positions/types. Please label each column with a letter.





2. Mark the positions of all super-insulated columns and letter each column so that the columns on the plan can be matched to the order form below.

- Ensure you clearly show host walls so we can determine column type
- Ensure you clearly show outlets so we can provide the right drainage products.

3. Answer the following questions, ensuring where required you answer for each column that you have lettered on the plan above.

4. Upon placement of your super-insulated column order, an order confirmation is generated which must be signed and sent back to Ultraframe. This order confirmation will clearly show the overall opening sizes to allow for frame size calculation.

Job No.:3598

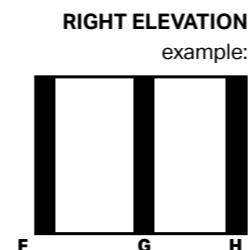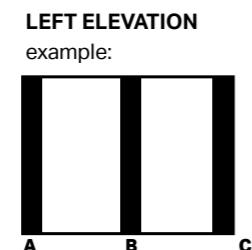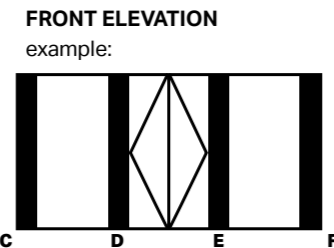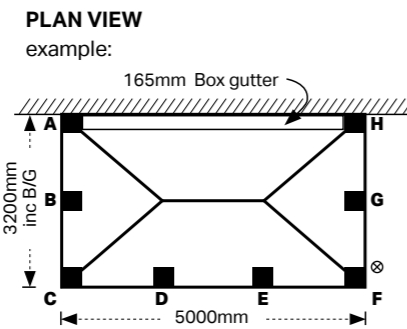

# ORDER FORM

## Super insulated columns

**JOB REFERENCE** .....

### COLUMN COLOUR

Colour  White  Matt Grey  Deeplas  Chartwell green  Cream  RAL/BS Colour .....

### COLUMN INFORMATION

See page 12 for sizes and page 18 for tips on how to measure. Remember to state height of each column from ground to eaves beam (Ensure you include the heights of frame, add ons and cills).

Column	Size		Claddings with column plinths (Full height only)	Claddings with masonry plinth cap	Claddings ONLY (to ground)	Set on cill	Style		Height (mm)
	Large	Small					Fluted	Plain	
A									
B									
C									
D									
E									
F									
G									
H									
I									

### TOP FINISH

Beam  Super duty eaves beam  Standard eaves beam  Quantal eaves beam.....  
 Roof  Livinroof  Ultrarroof  State height of cill .....

### DRAINAGE

Concealed outlets  
 Extended elephants trunk  
 Other

### CILL TYPE

Top  YES  NO  State height of cill .....  
 Bottom  Standard (Low slope 6-10°)  High slope (Slope 10-15°)  State height of cill .....

### CORNICE

Style  1 Tier  2 Tier  3 Tier  Curved  On Cill  
 Colour  White  Matt Grey  Deeplas  RAL/BS Colour .....

### BRICK PLINTH

If the doors are sank below floor level please advise. Please ensure column and door heights are consistent.

### EXTRA OPTIONS

Set out posts / Fixing kits Qty: .....  Coloured silicone to match column Qty: .....  
 Column support straps Qty: .....  Radiant heater panel Black White Qty: .....  
 130mm Aluminium cill Qty: .....  Heater controller LHC001 LHC005 Qty: .....  
 130mm Cill end cap L/R Qty: .....  Brick ties Qty: .....  
 Box gutter adaptors Qty: .....  Brickwork setout post Qty: .....  
 Concealed downpipe kit Qty: .....

Job No.:3598

Please sign and return to  
 roofsales@ultraframe.co.uk

SIGNED .....

DATE .....

Please sign and return to  
 roofsales@ultraframe.co.uk

SIGNED .....

DATE .....



[www.ultraframetrade.co.uk](http://www.ultraframetrade.co.uk)

Job No.2827 LGG002 v6 10/2017

It is Ultraframe's policy to continually seek to improve its products, processes and services, and we reserve the right to change specifications without prior notice. Ultraframe is a trading name of Ultraframe (UK) Limited.



**Ultra**frame  
Transforming light and space